



DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
3/24/07	A	DIM. 107.8 WAS 107.9 DIM. 9.5 WAS 8.89 DIM. 50.2 WAS 49.5	T.B.	B.S.	

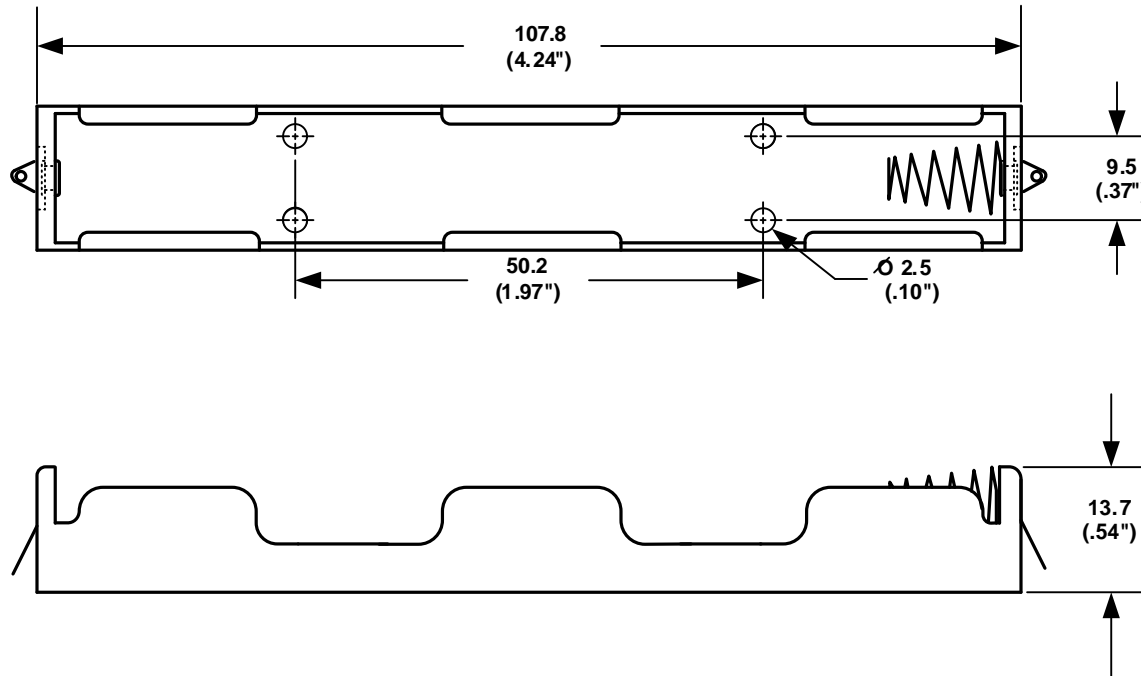

ORDERING CODE BC12AA


SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS = SF



Note: Dimensions in mm. (inches)

SPECIFICATIONS :

Plastic material - polypropylene
Springs - nickel plated spring steel
Wire - 152.4 mm Ref. Long 26 AWG,
UL1007, CSA - TR-64, 300V, 80°C
Rivets - Brass, nickel plated
9 Volts Snaps - Brass, nickel plated

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")		NONE	APPROVED BY T.B.
FRACTIONAL	TITLE	TWO "AA" CELL HOLDER	
+ .8 (.030")		DATE	DRAWING NUMBER
ANGULAR		3/24/2007	BC12AAL
+ 3°			
-			