
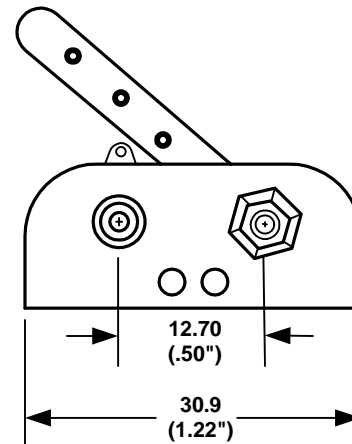


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

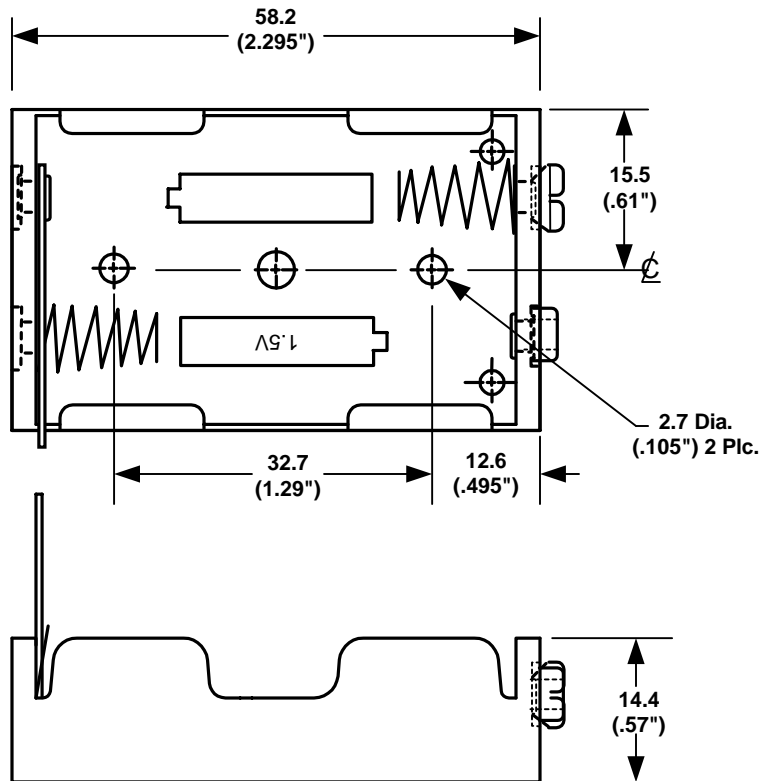


ORDERING CODE BC2AA

SPECIFICATIONS :

Plastic material - Polypropylene, Black
 Springs - nickel plated spring steel
 Wire - 152.4 mm Ref.Long 26 AWG,
 UL1007, CSA - TR-64, 300V, 80° C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9 VOLT TYPE SNAPS	=SF
BUMPER PLATES	=B

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020") - .5 (.020")	SCALE	DRAWN BY B.S.
FRACTIONAL		NONE	APPROVED BY
ANGULAR	+ 3° - 3°	TITLE: TWO "AA" CELL HOLDER DATE: 03/10/2001 DRAWING NUMBER: BC2AABSF	