

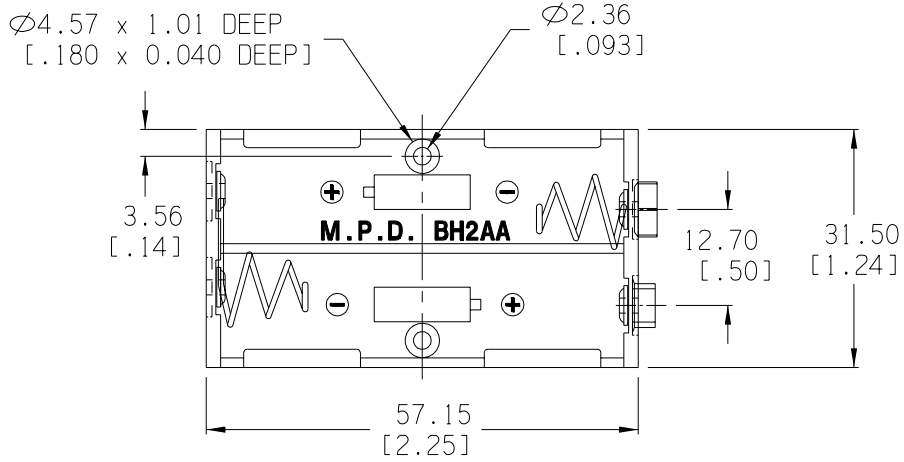
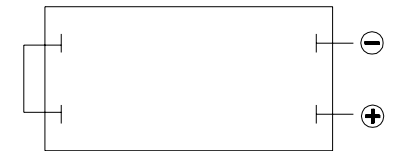


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

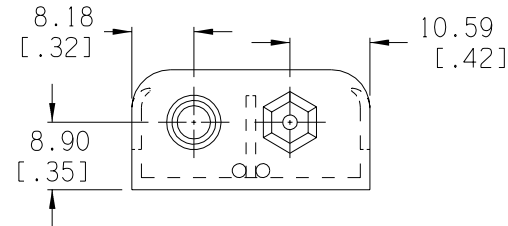

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

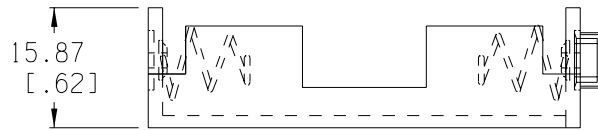


INTER CONNECTION SCHEMATIC

NOTES:

MATERIAL:

HOUSING: IMPACT RESISTANCE NYLON #6, BLACK, UL 94V-2, MATERIAL FILE #UL E 88499(S)
 SPRING: SPRING STEEL, NICKLE PLATED
 CONTACTS: SPRING STEEL, NICKLE PLATED
 EYELETS: BRASS, NICKLE PLTD.
 TERMINALS: BRASS, NICKLE PLTD., SNAP FASTENER MALE/FEMALE TERMINALS

Tolerance (Inches)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal	Scale	Drawn By B.S.	
$\pm .5$ (.020)		Approved By T.B.	
Fractional	Title		
$\pm .8$ (.030)	2AA BATTERY HOLDER WITH SNAP FASTENERS		
Angular	Date	Drawing Number	
$\pm 3^\circ$	01/26/02	BH2AA-SF	