
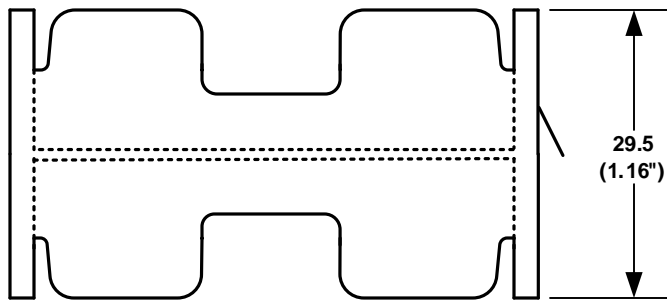



DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
11/02/07	A	ADDED "ROHS COMPLIANT" AND UPDATED SPECIFICATION	T.B.	B.S.	

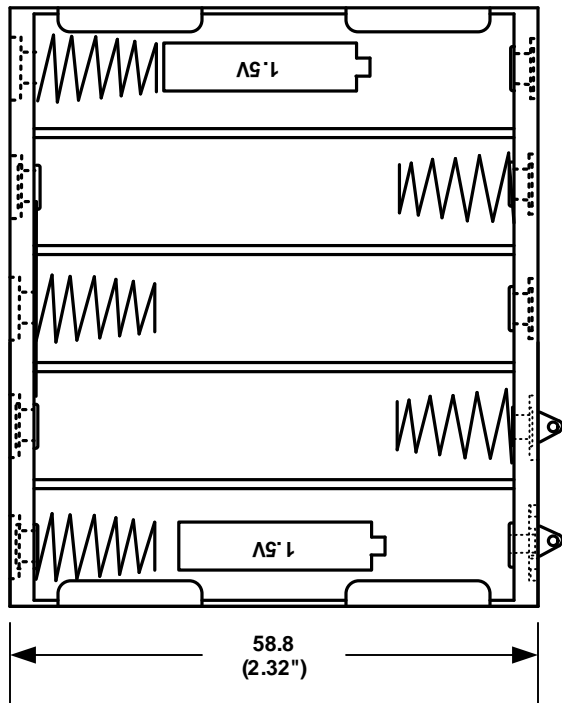

SOLDER LUGS SHOWN ABOVE

ORDERING CODE BH310AA


SOLDER LUGS = L
 (6") WIRE LEADS = W
 9 VOLT TYPE SNAPS = SF

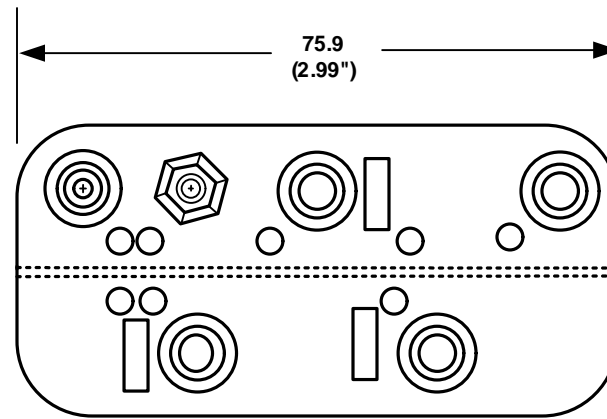

SPECIFICATIONS :

Plastic material - Polypropylene, Black
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated spring steel
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")		NONE	APPROVED BY
FRACTIONAL	TITLE	TEN "AA" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	11/02/2007	BH310AAL	