







TO CONNECT CONTACT WIRE;

1. INSERT POSITIVE AND NEGATIVE CONTACT (ON WIRE END) BETWEEN THE COILS OF THE SPRING, PUSHING UNTIL CONTACT SNAPS ONTO SPRING, RESPECTIVELY.
2. SLIDE BATTERY CARTRIDGE FULLY INTO HOUSING.

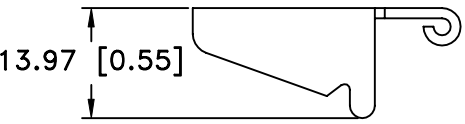

Date	SYM	REVISION RECORD	AUTH	DR.	CK.

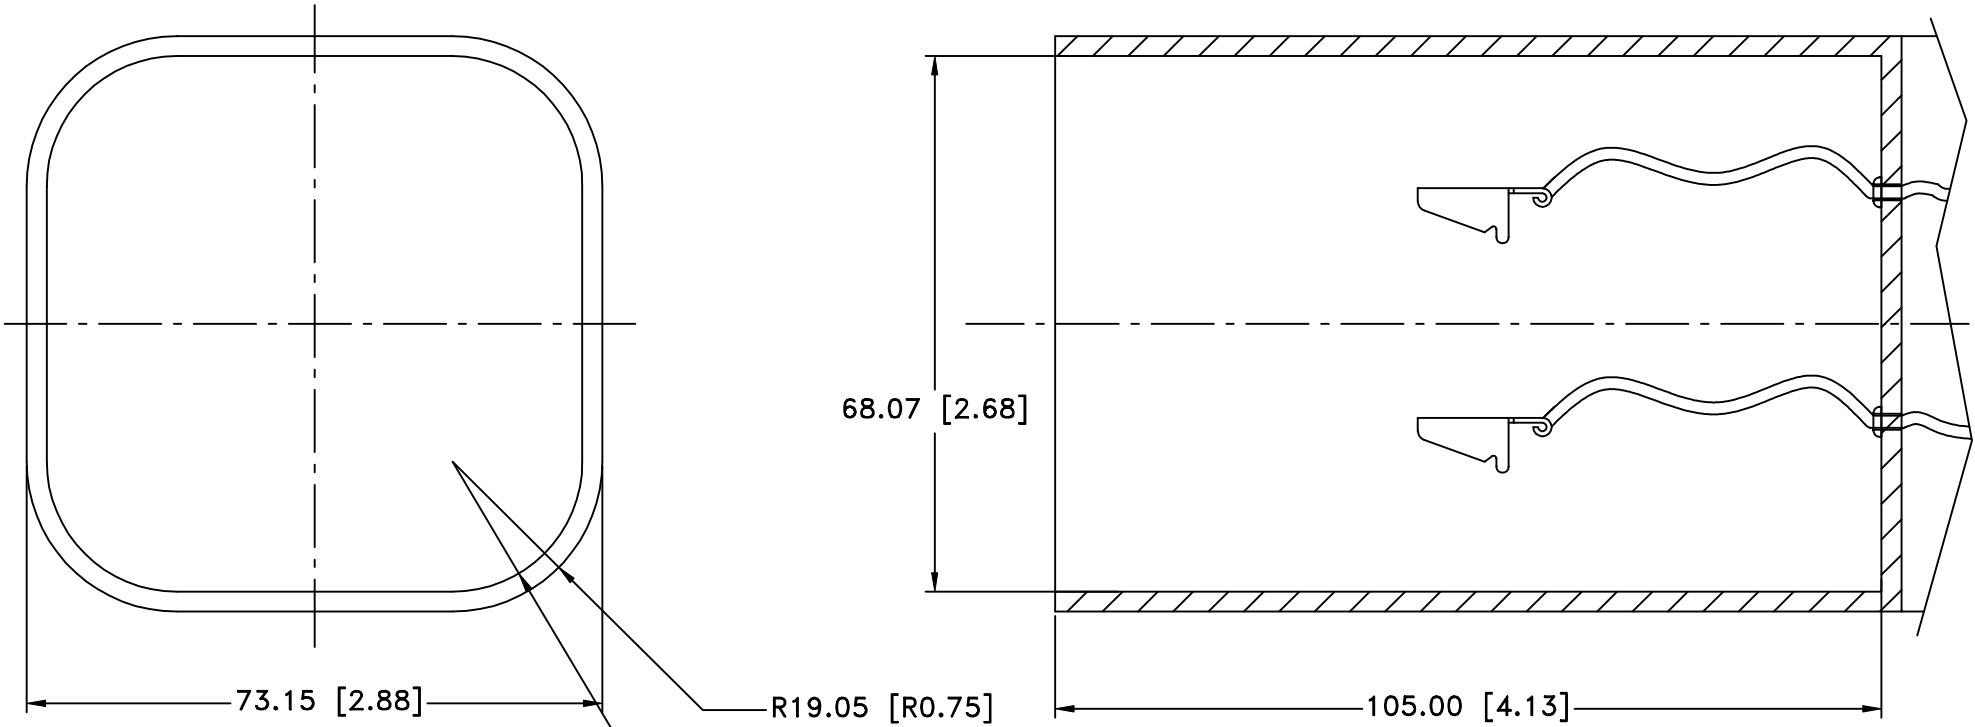

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	
decimal ±.5 (.020)	Scale	Drawn By B.S.
Fractional ± .8 (.030)	Approved By T.B.	
Angular ± 3°	Title FOUR "D" HOLDER SKETCH FOR P/N BA4D-S	Drawing Number BK-896
	Date 04/24/01	