






Ø4.57 x 1.01 DEEP  
[.180 x 0.040 DEEP]

Ø2.36  
[.093]

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR  
EYELETS 0.089" OD BY 0.15" FLANGE  
STIMPSON GS-3 SERIES OR EQUIVALENT  
ALSO ADHESIVES AND DOUBLE SIDED  
TAPES WORK WELL.


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/26/03	A	Changed Material Specification	T.B.	B.S.	
2/17/07	B	Added "ROHS COMPLIANT"	T.B.	B.S.	

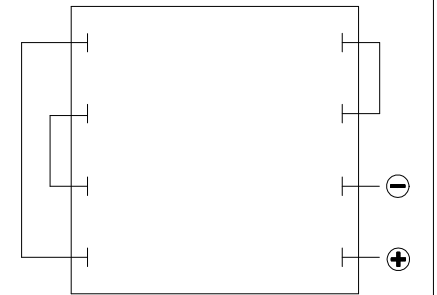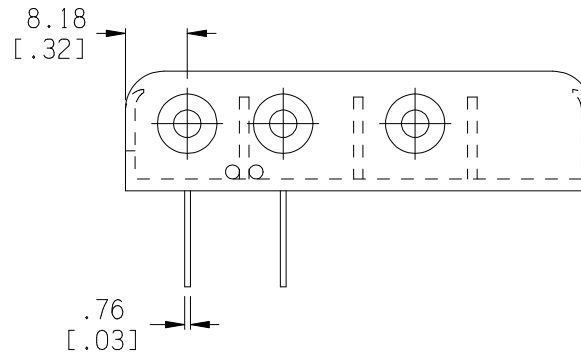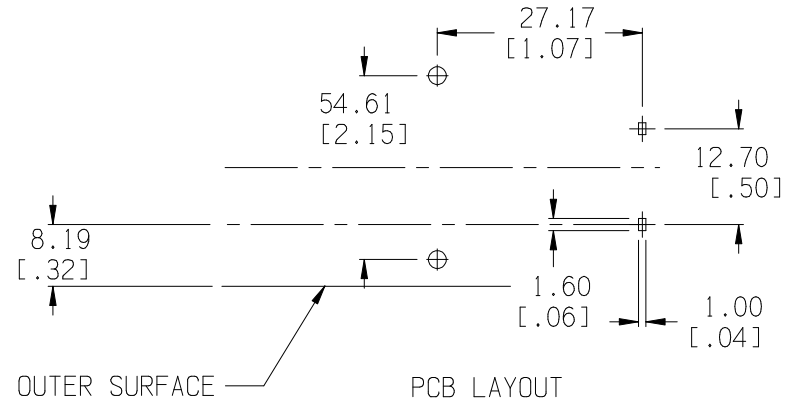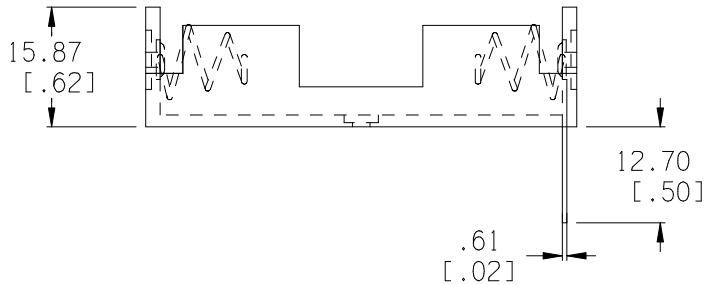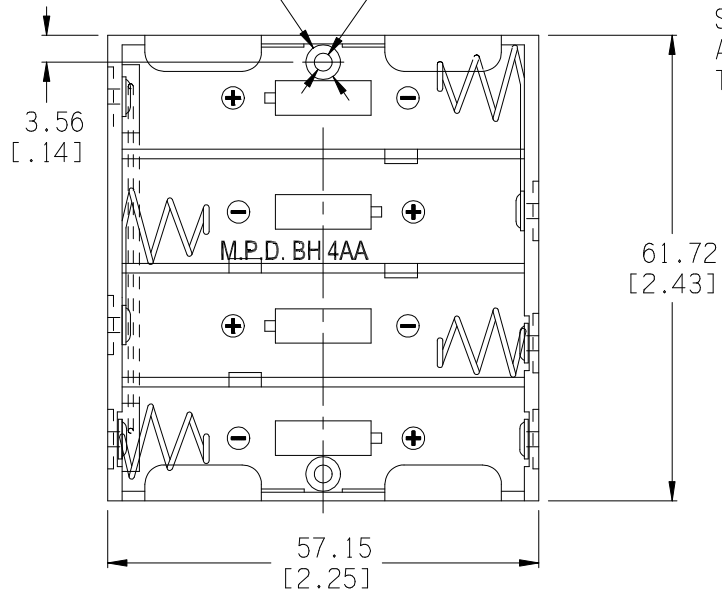

NOTES:

MATERIAL:

HOUSING: IMPACT RESISTANCE NYLON #6, BLACK, UL 94V-0,  
MATERIAL FILE #UL E 48285  
SPRING: SPRING STEEL, NICKLE PLATED  
CONTACTS: SPRING STEEL, NICKLE PLATED  
EYELETS: BRASS, NICKLE PLTD.  
ROHS COMPLIANT

Tolerance (Inches)	 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal	±.5 (.020)	Scale	Drawn By B.S.
Fractional		Approved By T.B.	
Angular	± .8 (.030)	Title 4AA BATTERY HOLDER WITH PC PINS	
	Date 2/17/07	Drawing Number BH4AA-PC	