
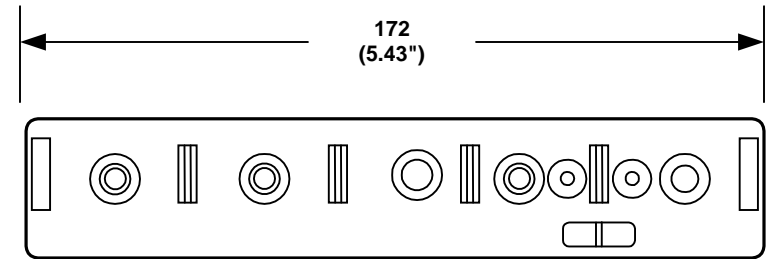


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

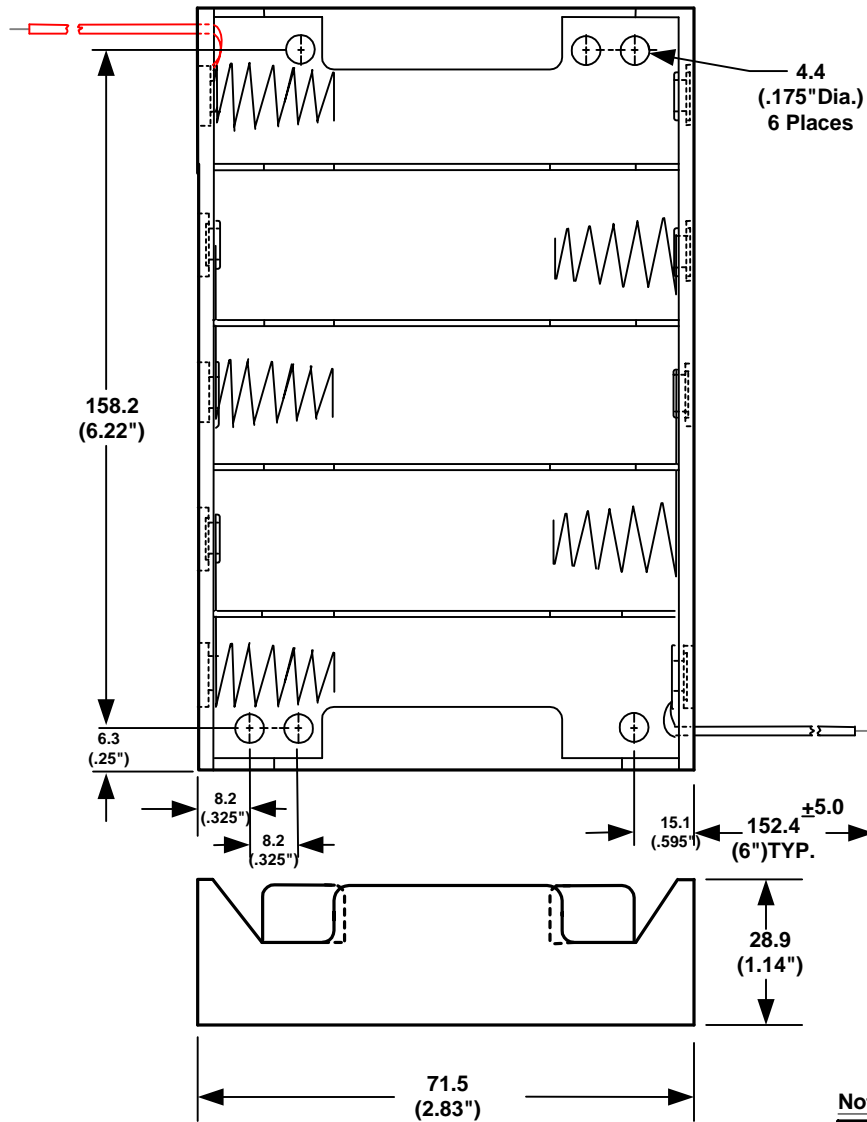

WIRE LEADS SHOWN ABOVE


SPECIFICATIONS:

Plastic material - polypropylene
 Springs - nickel plated spring steel
 Wire - 152.4 mm Ref. Long 26 AWG,
 UL1007, CSA - TR-64, 300V, 80°C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated

ORDERING CODE BH5D

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9VOLT TYPE SNAPS	= SF

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	TITLE	SCALE	DRAWN BY S.C.
+ .5 (.020") - .5 (.020")		APPROVED BY	
FRACTIONAL	DATE	FIVE "D" CELL HOLDER	
+ .8 (.030") - .8 (.030")		DRAWING NUMBER	BH5DW
ANGULAR	12/05/2000		
+ 3° - 3°			