



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
09/06/23	C	Added Wire Identification	D.L.	B.S.	
09/14/23	D	Added word "RIBBED" to positive wire Added current rating	D.L.	B.S.	

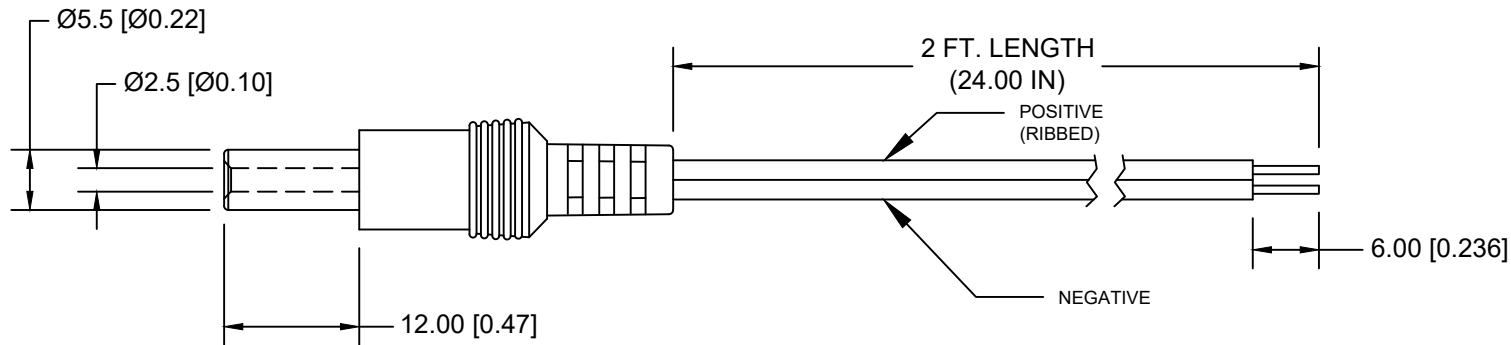

Estimated Weight: 13.83 g

NOTES:

HOUSING: BLACK  
CORD: 300V, 105°C, 18AWG, UL FILE NO. E119741  
PASSES UL FLAME TEST VW-1  
CENTER IS POSITIVE CONTACT  
DC MOLDED PLUG: 2.5mm X 5.5mm  
CURRENT RATING: 10A  
ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale	Drawn By B.S.	
		Approved By D.L.	
Fractional ± .8 (.030)	Title 2.5mm DC MOLDED PLUG WITH 2' WIRE LEADS		
Angular ± 3°	Date 09/14/23	Drawing Number 172-4202	