




Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/26/16	A	DIM. 16.00 WAS 12.00 REEL QTY. WAS 1200 PCS.	T.B.	B.S.	

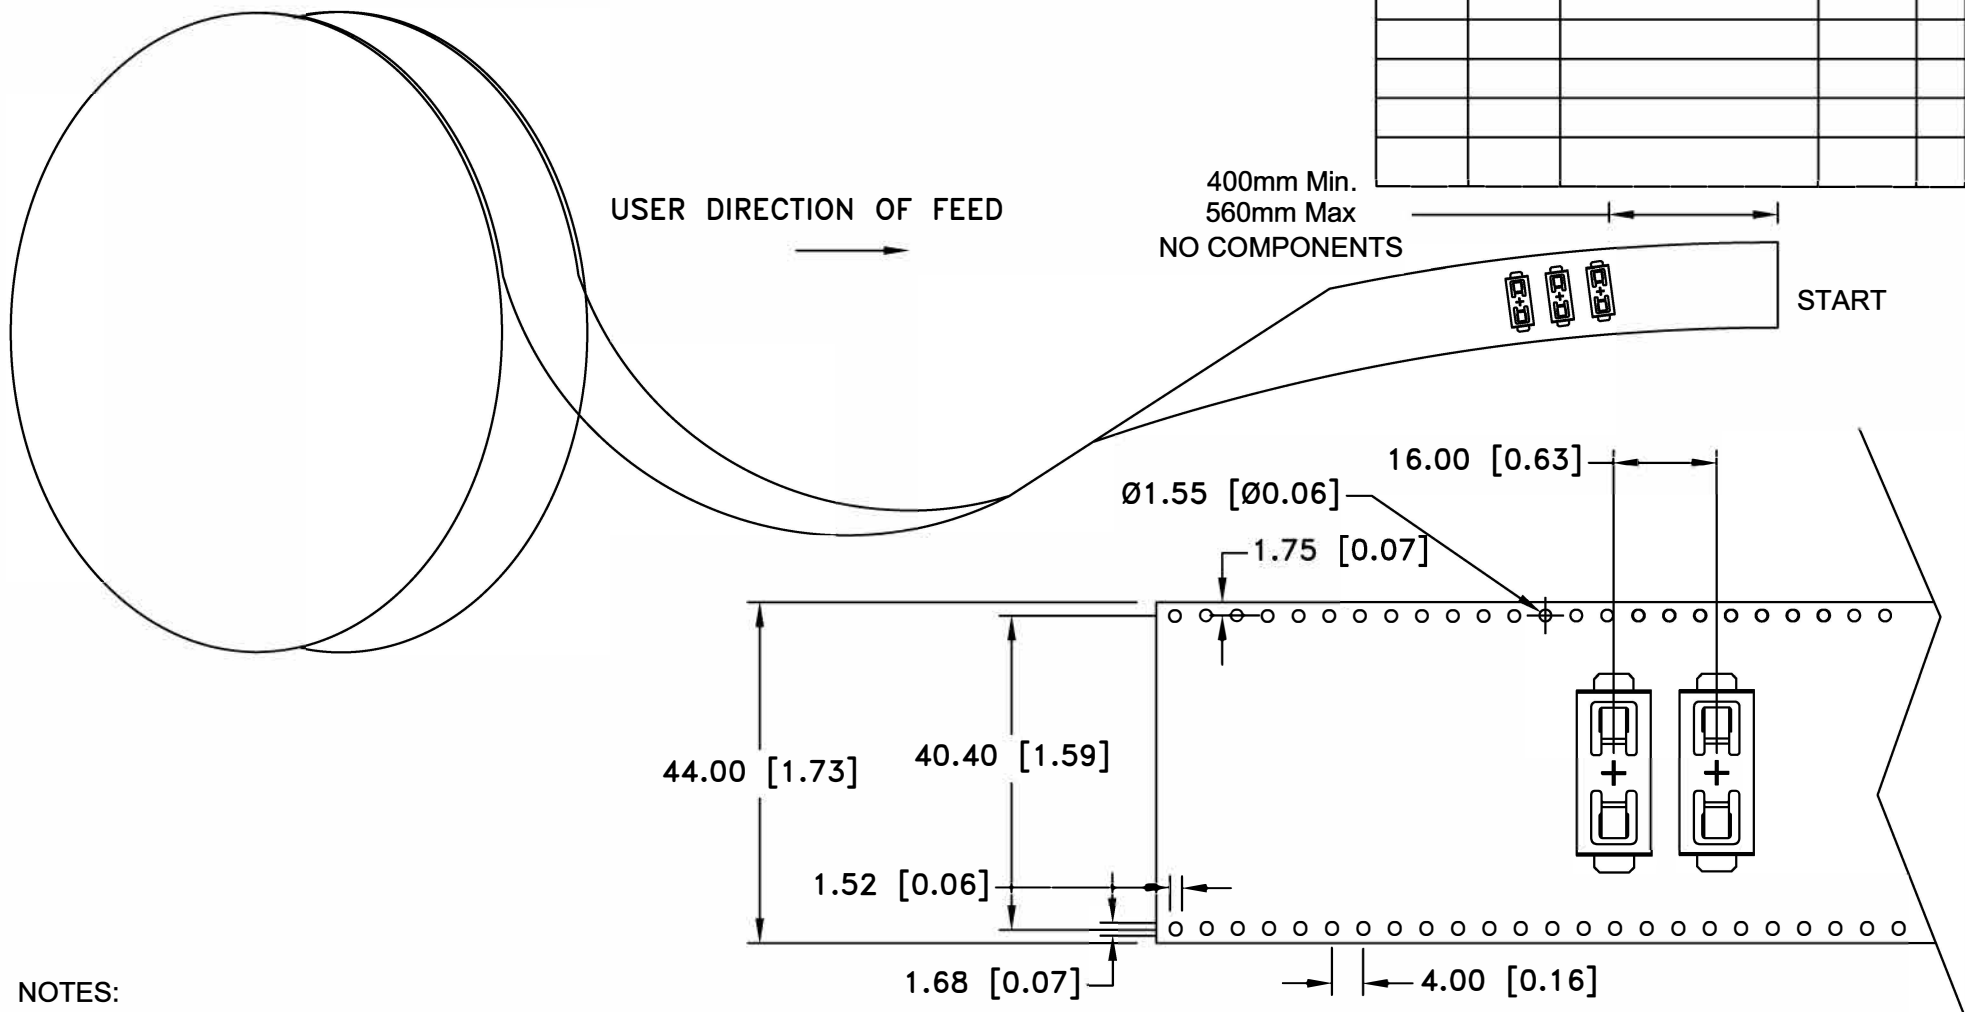

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
 2. Carrier camber not to exceed 1mm in 250mm
 3. Material: Transparent Anti-static Polystyrene
 4. Thickness: $0.35 \pm 0.05\text{mm}$
 5. Component loader per 13" reel: 1000 pcs
 6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 	<small>Visit our Website for a complete list of our products. www.batteryholders.com www.memoryprotectiondevices.com We specialize in custom parts! sales@memoryprotectiondevices.com</small>	
		decimal $\pm .5$ (.020)	Scale
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR CR2032 BATTERY STRAP, SMT		
Angular $\pm 3^\circ$	Date 02/26/16	Drawing Number BC-2003-TR	
		Approved By T.B.	