



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

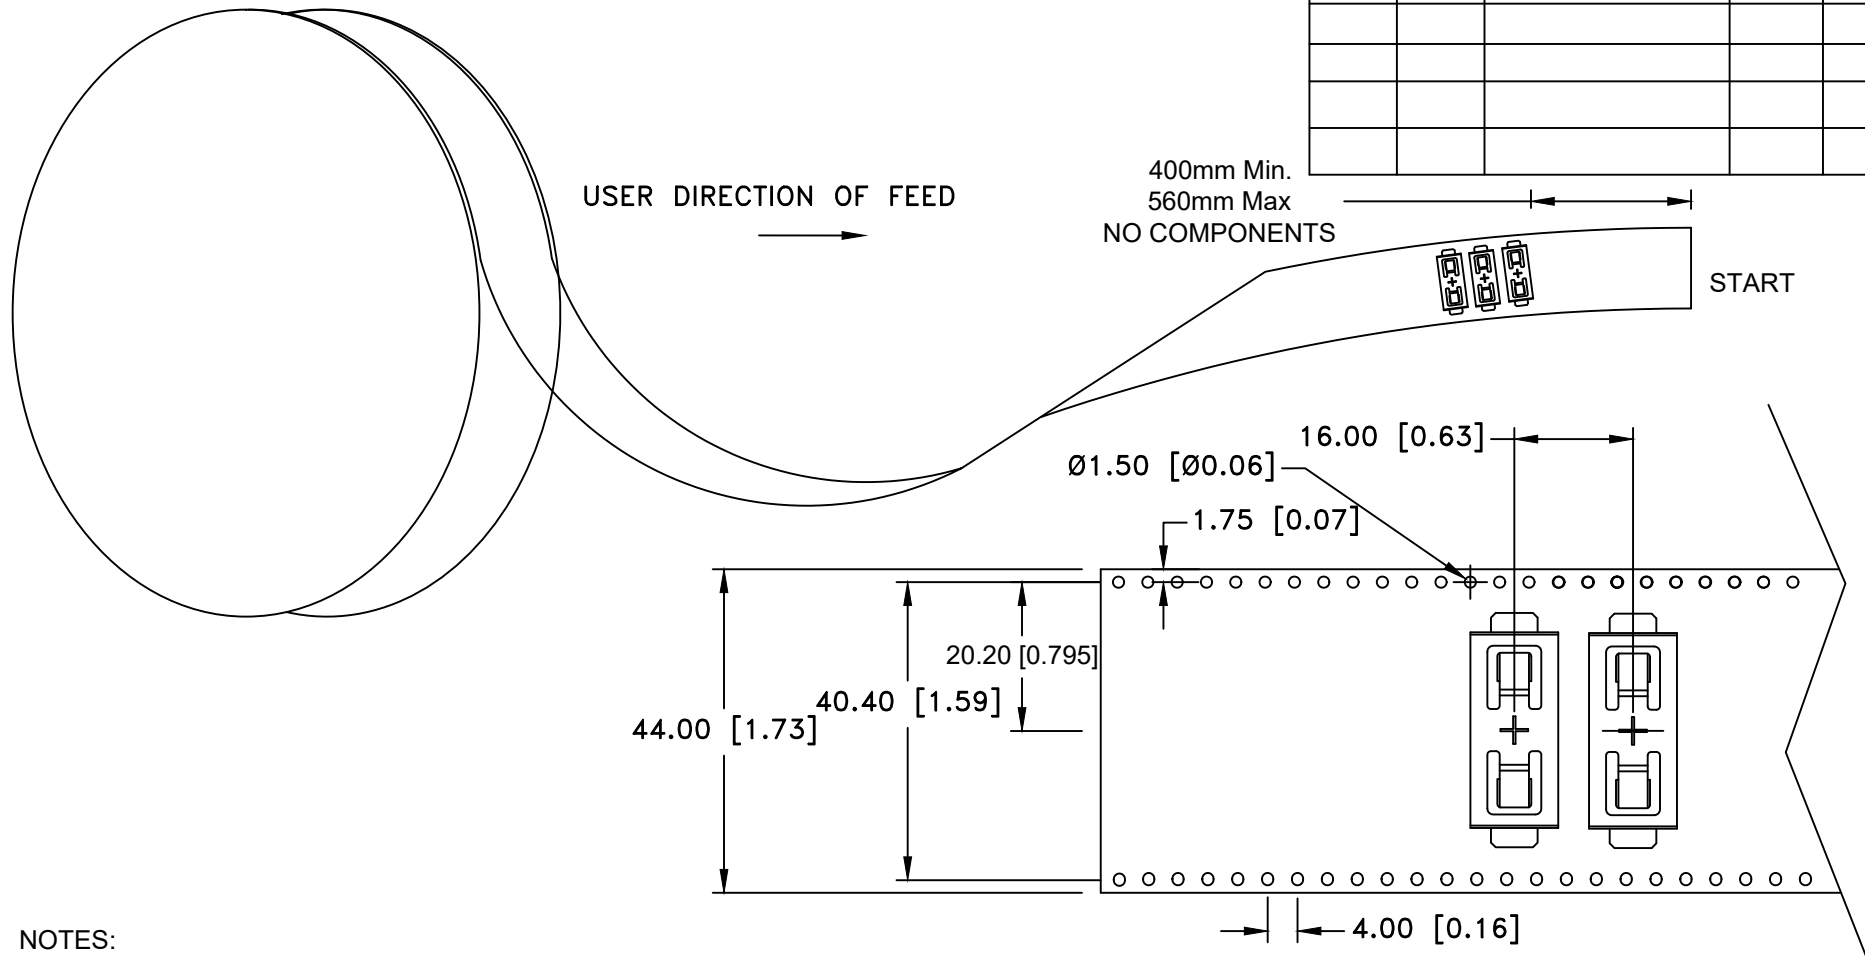

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 100mm
3. Material: Black Anti-static Polystyrene
4. Thickness: $0.35 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 1200 pcs
6. All dimensions per EIA-481-C

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal $\pm .5$ (.020)	Scale	Drawn By B.S. Approved By D.L.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR CR2025 BATTERY STRAP, SURFACE MOUNT		
Angular $\pm 3^\circ$	Date 04/17/26	Drawing Number BC-2018-TR-99	