Date	SYM	REVISION RECORD	AUTH	DR.	CK.

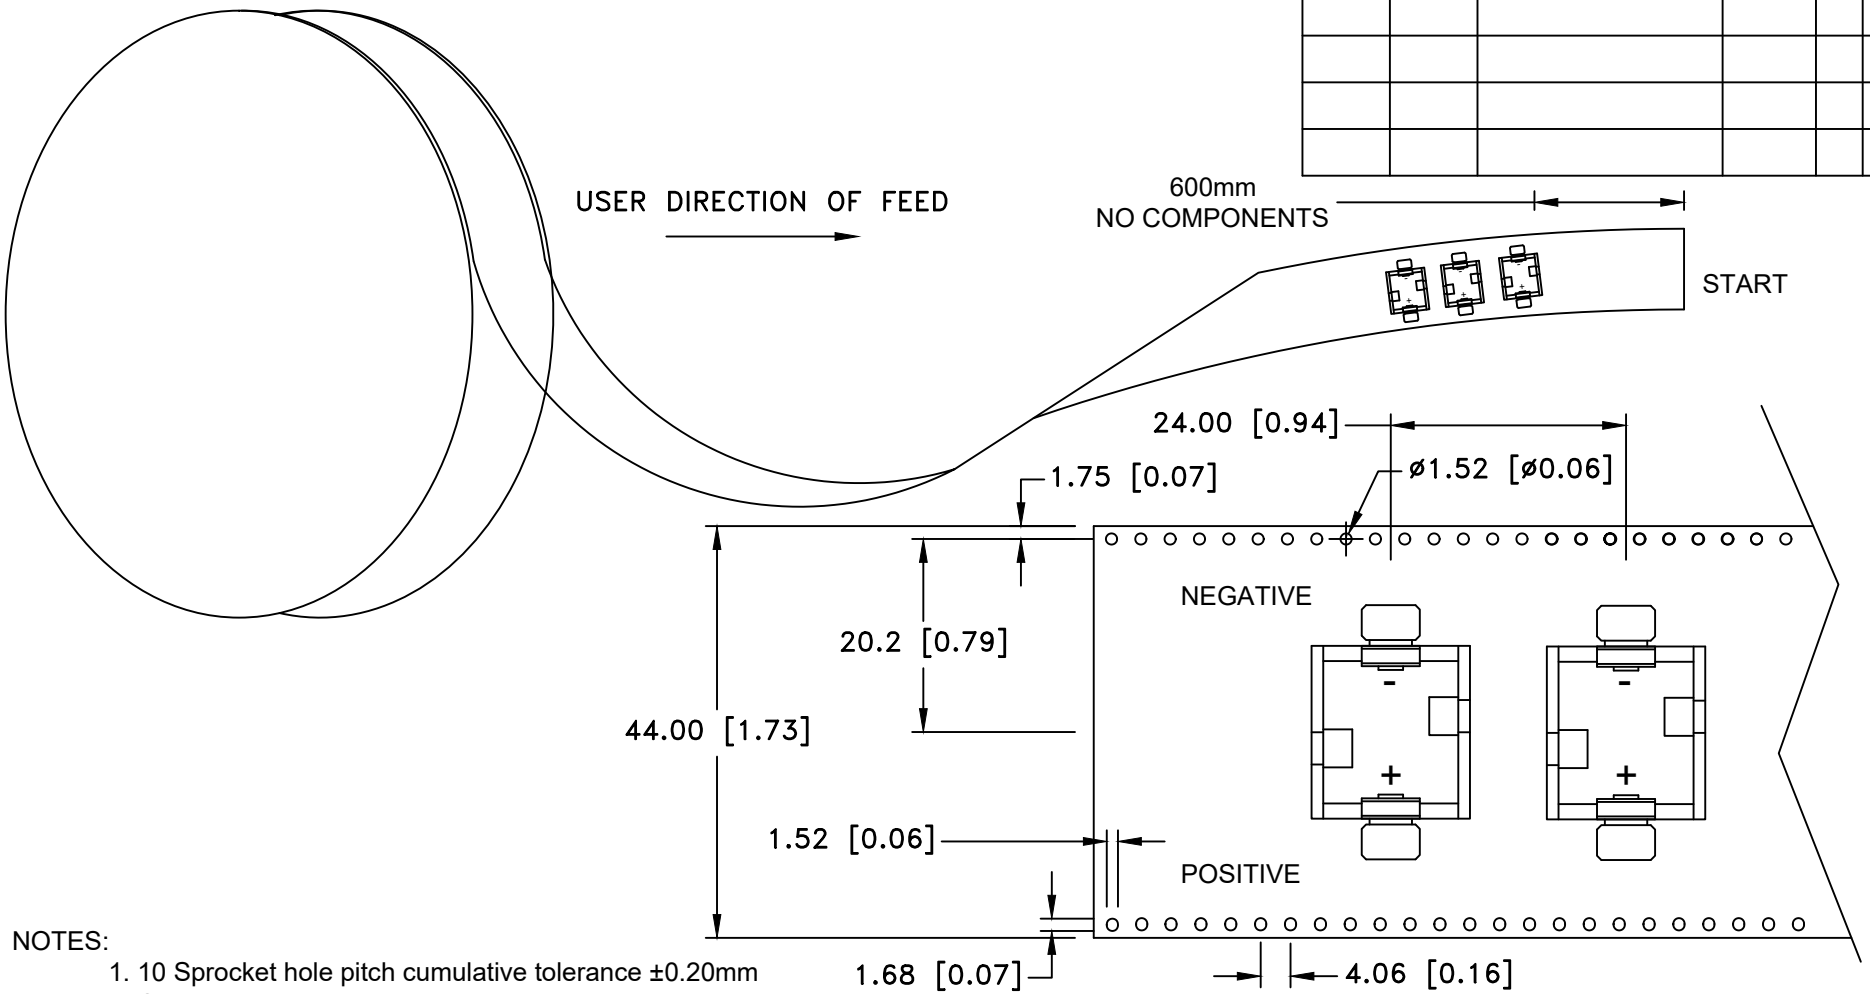

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance ±0.20mm
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Transparent Anti-static Polystyrene
4. Thickness: 0.35±0.05mm
5. Component loader per 13" reel: 150 pcs
6. All dimensions per EIA-481-2A
7. End: No components , 200mm minimum

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By D.L.
Fractional ± .8 (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BC 1/3N-C-SM		
Angular ± 3°	Date 08/20/25	Drawing Number BC1/3N-C-SM-TR-99	