


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/26/19	E	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
10/07/19	F	ADDED WEIGHT OF THE PART	T.B.	B.S.	
08/18/23	G	UPDATED SPECIFICATION	T.B.	B.S.	
10/19/23	H	ADDED DIM. 20.19, DIM. 0.68 DIM. R11.50 WAS R12.64	T.B.	B.S.	

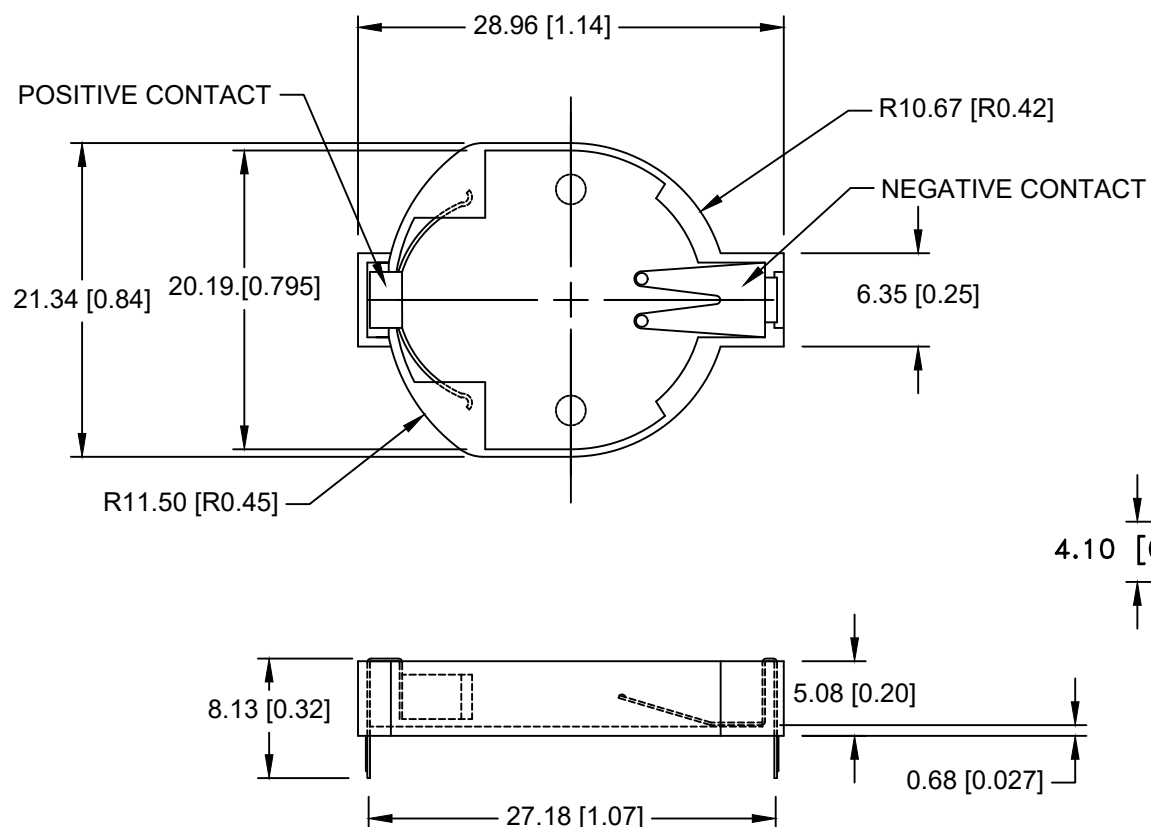

Estimated Weight: 1.224 g

SPECIFICATIONS:

- * Holder material- PBT, 30% glass reinforced, Black, UL94V-0
Temperature range: -40°C to +180°C, UL File no. E45587
- * Contacts : Stainless Steel 301, spring temper, Nickel Plated,
- * Vibration test: 10-55-10 hz swept in 60 seconds
x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
no discontinuity over 10 micro-seconds
- * Shock test: half sine wave acceleration 80g.
6 micro-seconds 1 shock pulses each direction per axis,
total 3 times
- * Result: no evidence of physical damage
- * Drop Test: Mounted on board and dropped 1 time from 1m high to
wood floor
- * Result: No dislodgement of the cell, No damage to the holders
- * ROHS COMPLIANT

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional ± .8 (.030)	Title CR2032 BATTERY HOLDER, THRU HOLE		
Angular ± 3°	Date 10/19/23	Drawing Number BC2032-E2	