



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/14/13	D	Updated title	T.B.	B.S.	
07/07/17	E	DIM. 150.0 WAS 142.4	T.B.	B.S.	
03/07/19	F	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

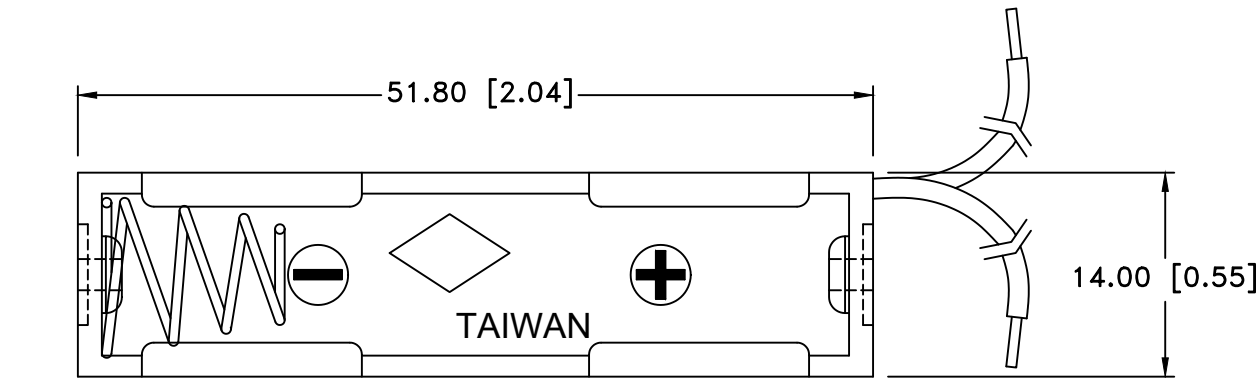

Estimated Weight: 5.0002 g

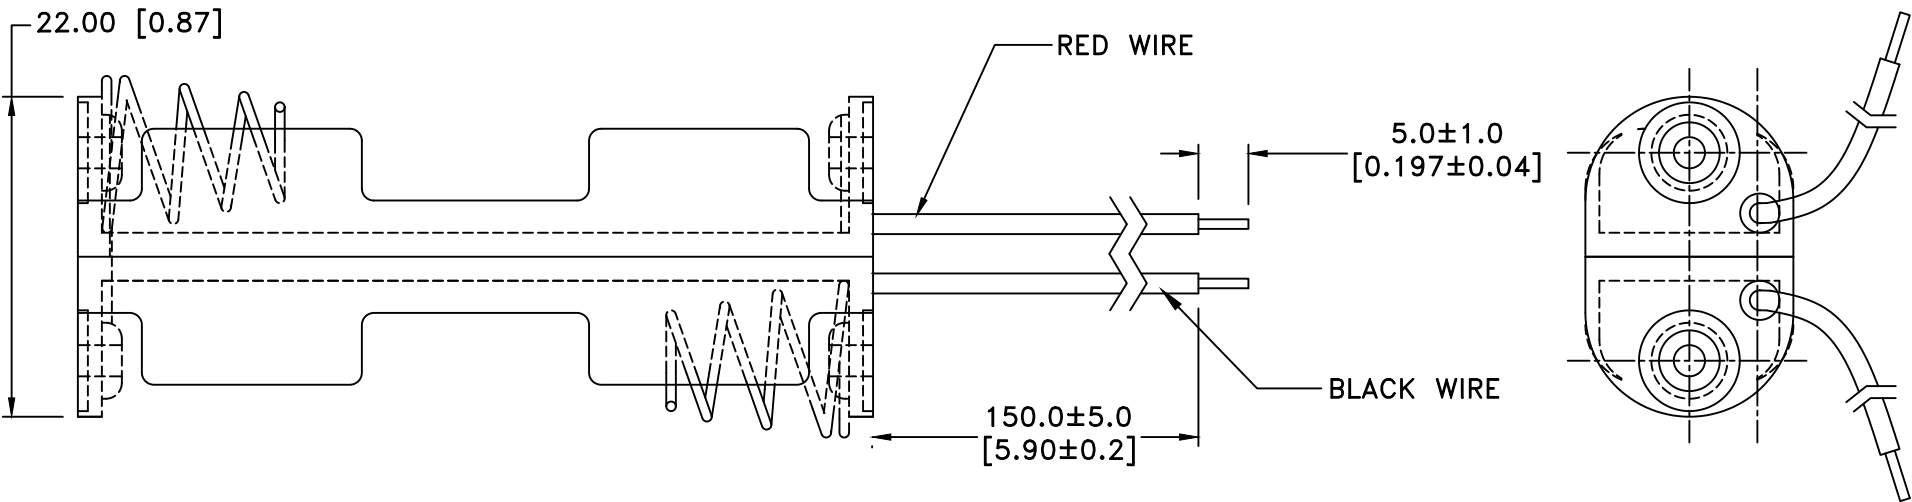

NOTES:

Plastic material - Polypropylene, PP-1040
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA, TR64, 300V, 80°C
 Rivets - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title TWO "AAA" CELL HOLDER WITH WIRE LEADS		
Angular ± 3°	Date 03/07/19	Drawing Number BC22AAAW	