



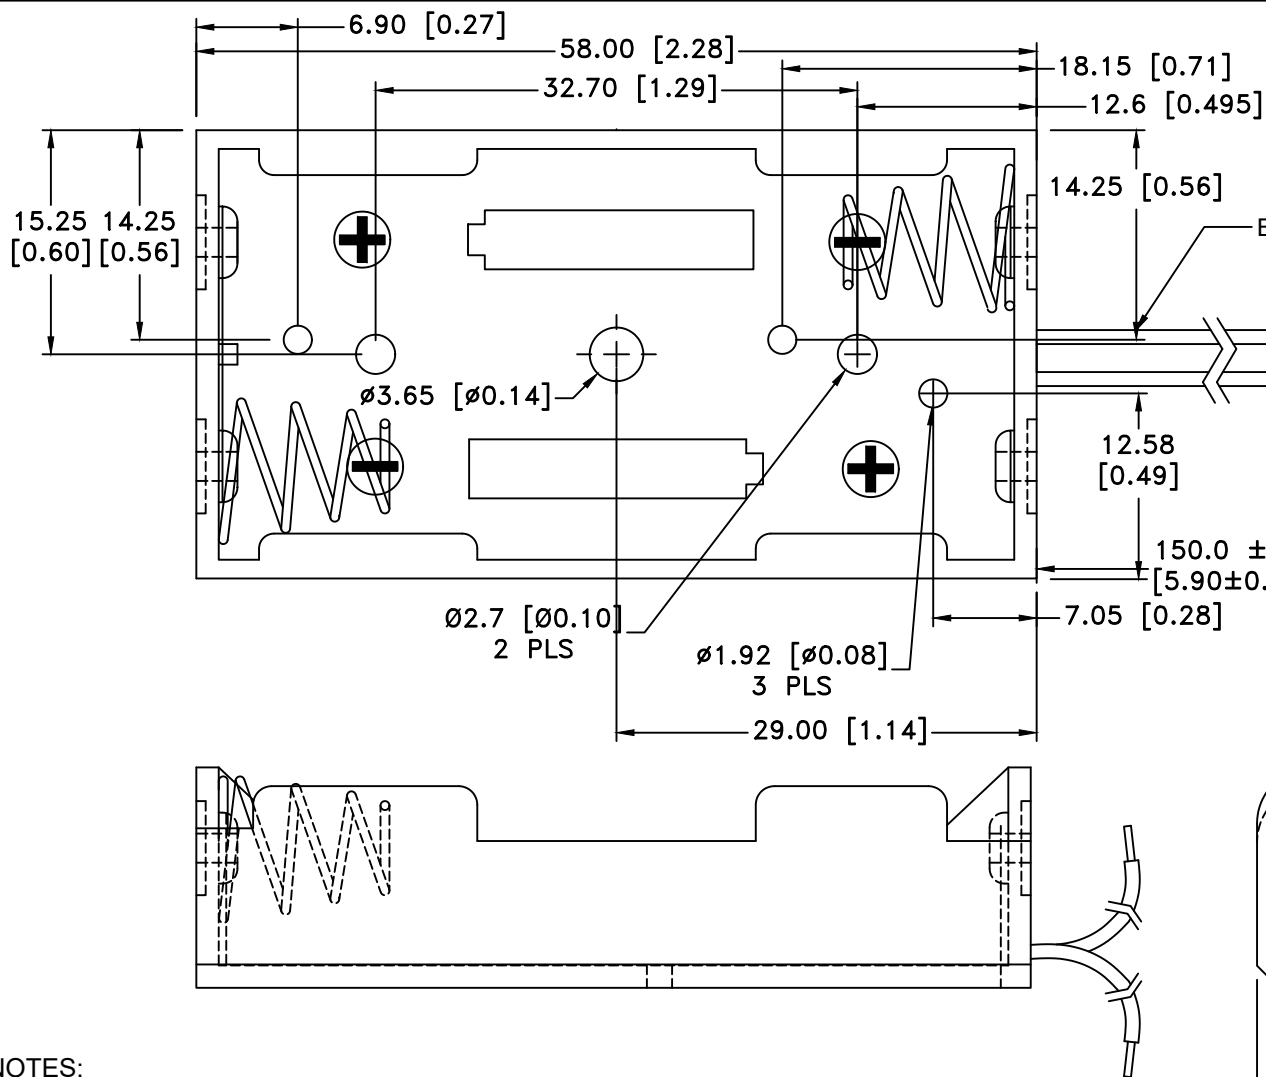

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/13/19	K	REMOVED RIB ADDED CHAMFER	T.B.	B.S.	
03/06/19	L	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
05/14/24	M	Dim. 32.70 was 32.95	D.L.	B.S.	

5.0±1.0
[0.196±0.04]

RED WIRE

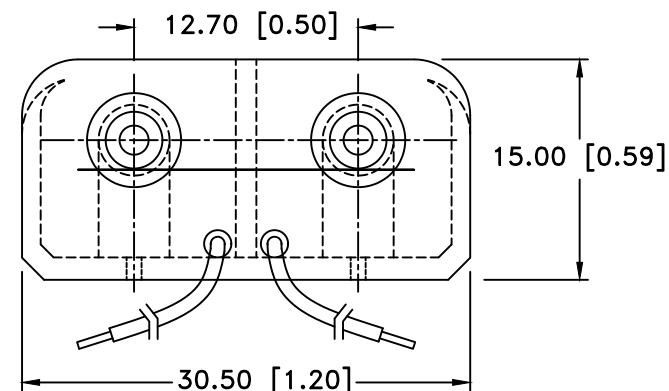

NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: SPRING STEEL, NICKEL PLATED.
 WIRE: 26 AWG, UL1007, CSA, TR64, 300V, 80°C
 WIRE UL FILE E193578
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000
 ROHS COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)		Approved By D.L.	
Angular ± 3°	Title	TWO "AA" CELL HOLDER WITH WIRE LEADS	
	Date	Drawing Number	
	01/30/26	BC2AAW	