
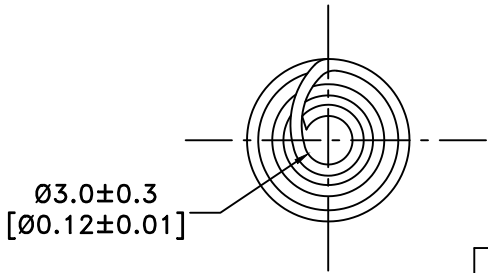
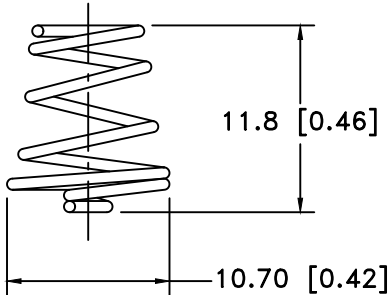


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/26/19	B	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
2/23/22	C	DIM. 11.3 WAS 12.50. DIM. 7.0 WAS 7.30	T.B.	B.S.	
4/18/22	D	DIM. 11.8 WAS 11.3 DIM. 5.4 WAS 7.0 DIM. 3.0 WAS 2.50	T.B.	B.S.	

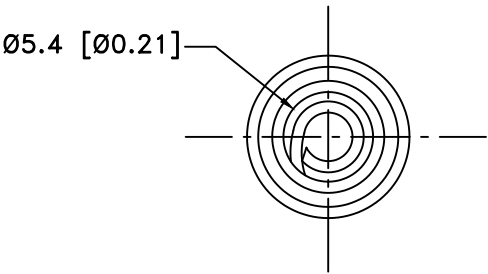

NOTES:

MATERIAL: SPRING STEEL WIRE, HIGH CARBON STEEL, NICKEL PLATED
 BCAA-HD WITH WIRE DIA 0.032" (0.8mm).
 ROHS COMPLIANT

Spring rate: 0.429 kg/mm

Tolerance (Except as noted) decimal ± .5 (.020) Fractional ± .8 (.030) Angular ± 3°	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
			Scale
			Drawn By B.S.
	Title		Approved By T.B.
	AA BATTERY SPRING CONTACT, HEAVY DUTY		
	Date	Drawing Number	
	04/18/22	BC-AA-HD	