
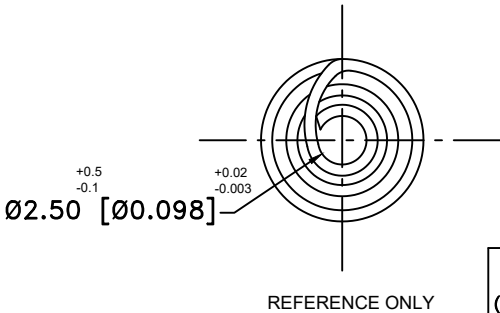
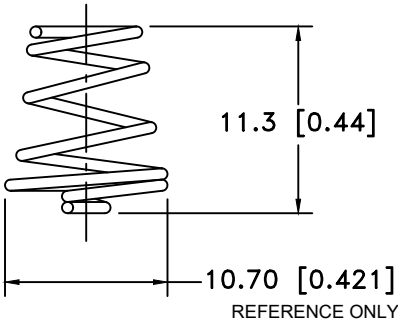


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/26/19	D	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
4/30/19	E	ADDED WIRE DIAMETER DIM. 12.5 WAS 11.3	T.B.	B.S.	
2/23/22	F	DIM. 11.3 WAS 12.5 DIM. 7.0 WAS 7.30	T.B.	B.S.	
4/18/22	G	DIM. 5.6 WAS 7.0 TOLERANCE FOR DIM. Ø2.50 WAS ^{+0.3} _{-0.1}	T.B.	B.S.	

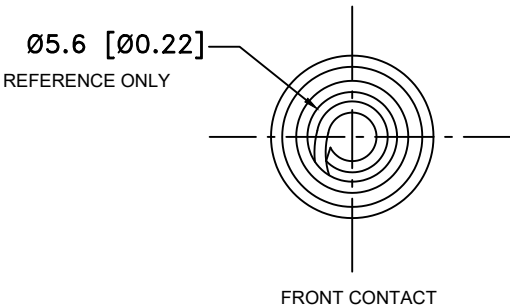

NOTES:

MATERIAL: 0.7mm Dia. SPRING STEEL WIRE, NICKEL PLATED
ROHS COMPLIANT

Spring rate: 0.230kg/mm

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional ± .8 (.030)	Title AA BATTERY SPRING CONTACT		
Angular ± 3°	Date 04/18/22	Drawing Number BC-AA	