
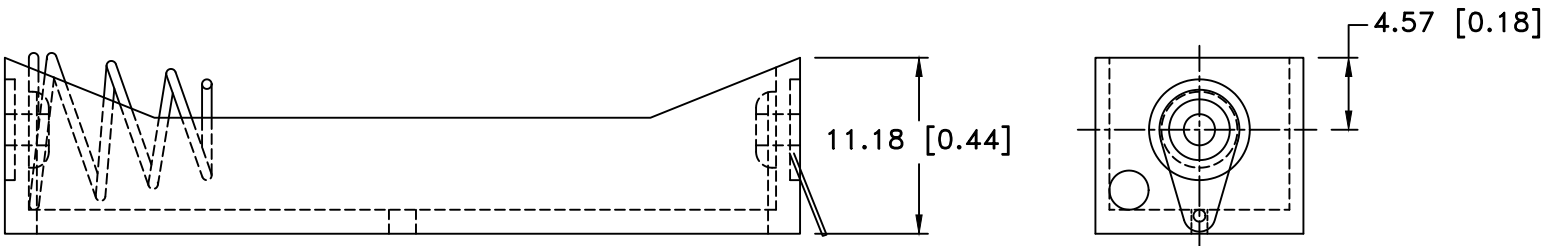


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/07/17	C	UPDATED NOTES	T.B.	B.S.	
03/26/19	D	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

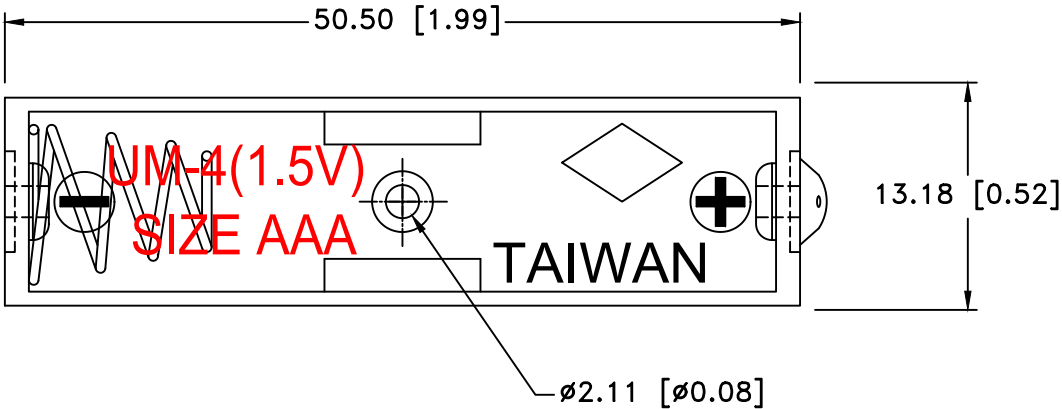

NOTES:

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Rivets - Brass, Nickel Plated
 Lugs: Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS COMPLIANT

Mounting Instruction:
 Use 2-56 machine screws or eyelets 0.089" OD by 0.15" flange stimpson GS-3 series or equivalent.
 also adhesives and double sided tapes work well.

Estimated Weight: 2.2000075 g

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
		Approved By T.B.	
Fractional ± .8 (.030)	Title ONE "AAA" CELL HOLDER WITH SOLDER LUGS		
Angular ± 3°	Date 03/26/19	Drawing Number BCAAAL	