
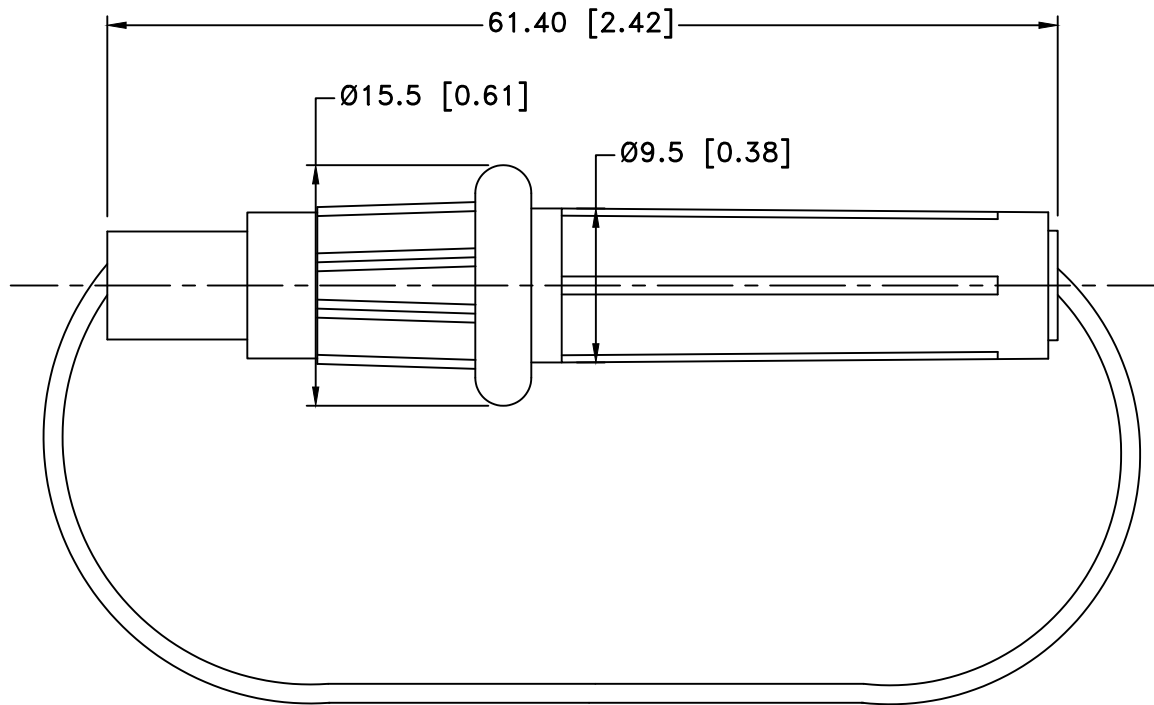
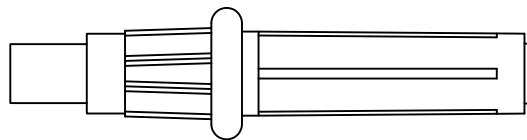


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/06/15	F	UPDATED CONTACT RESISTANCE FROM 5MΩ TO 5mΩ	T.B.	B.S.	
04/12/19	G	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	H	ADDED CONNECTOR VIEW	T.B.	B.S.	

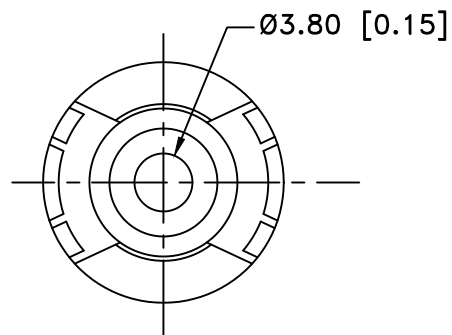

Weight: 6.70g

NOTES:

1. MATERIAL:

HOUSING : PP7533 , UL94 HB file no. E85783

2. LEAD WIRE IN LOOP: 16AWG, UL-CSA, 105°C, UL1015, 600V,
TOTAL LENGTH 8.125"

3. MAXIMUM CURRENT: 10A

4. INSULATION RESISTANCE AT 500V DC: 100MΩ MIN

5. CONTACT RESISTANCE: 5mΩ AT 1A DC

6. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN

7. ROHS COMPLIANT

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)			Approved By T.B.
Angular ± 3°	Date 11/26/19	Drawing Number BF301	