Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/24/17	K	UPDATED SPECIFICATION	T.B.	B.S.	
04/12/19	L	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	M	WAS RATED 10AMP. ADDED WIRE LENGTH	T.B.	B.S.	
07/16/24	N	UPDATED UL FILE NUMBER	D.L.	B.S.	
08/27/26	N	added the rated voltage	D.L.	B.S.	

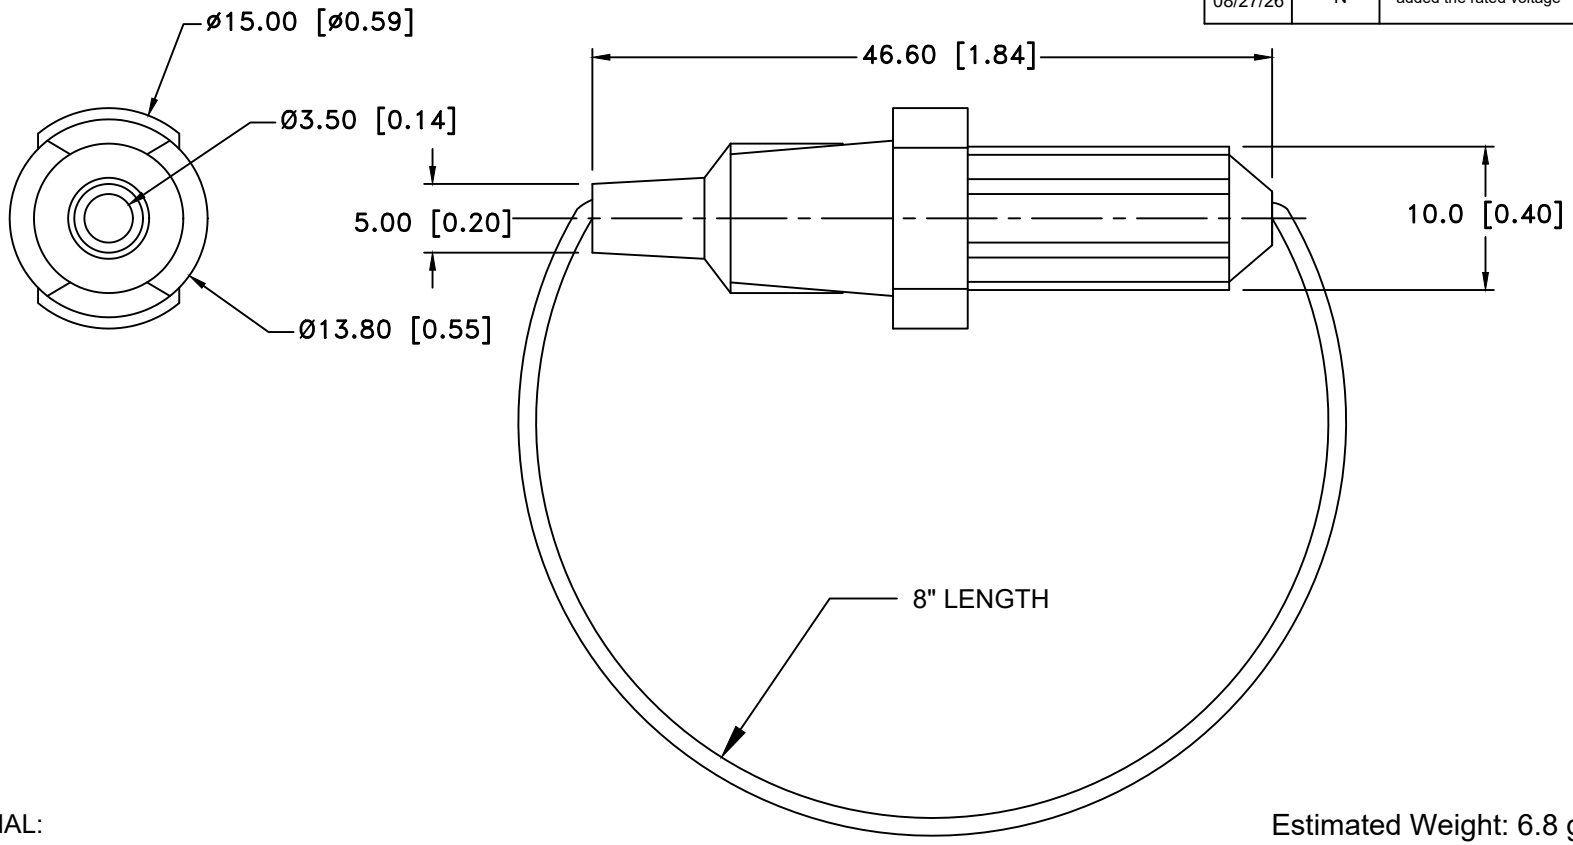

NOTES:

1. MATERIAL:

HOUSING : NYLON 66, UL 94V-2, UL FILE NO. E88637.
LEAD WIRE IN LOOP:8" OVERALL LENGTH RED WIRE, 16AWG, UL-1015, 600V, 105°C, FLAME RATING VW-1

3. RATED CURRENT: 15A Rated Voltage: 500V AC
4. ACCEPTS GMA/GTE FUSES
5. INSULATION RESISTANCE AT 500V DC: 100M Ω MIN
6. CONTACT RESISTANCE: 5m Ω AT 1A DC
7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN
ROHS COMPLIANT
8. Wires + Overmold: DC 32V Max.
9. Contact/Terminal are brass without plating

Estimated Weight: 6.8 g

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By D.L.
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER		
Angular ± 3°	Date 08/27/2026	Drawing Number BF303	