


| Date     | SYM | REVISION RECORD                       | AUTH | DR.  | CK. |
|----------|-----|---------------------------------------|------|------|-----|
| 04/12/19 | A   | UPDATED TO "ROHS COMPLIANT"           | T.B. | B.S. |     |
| 11/26/19 | B   | WAS RATED 80AMP.<br>ADDED WIRE LENGTH | T.B. | B.S. |     |
|          |     |                                       |      |      |     |
|          |     |                                       |      |      |     |
|          |     |                                       |      |      |     |

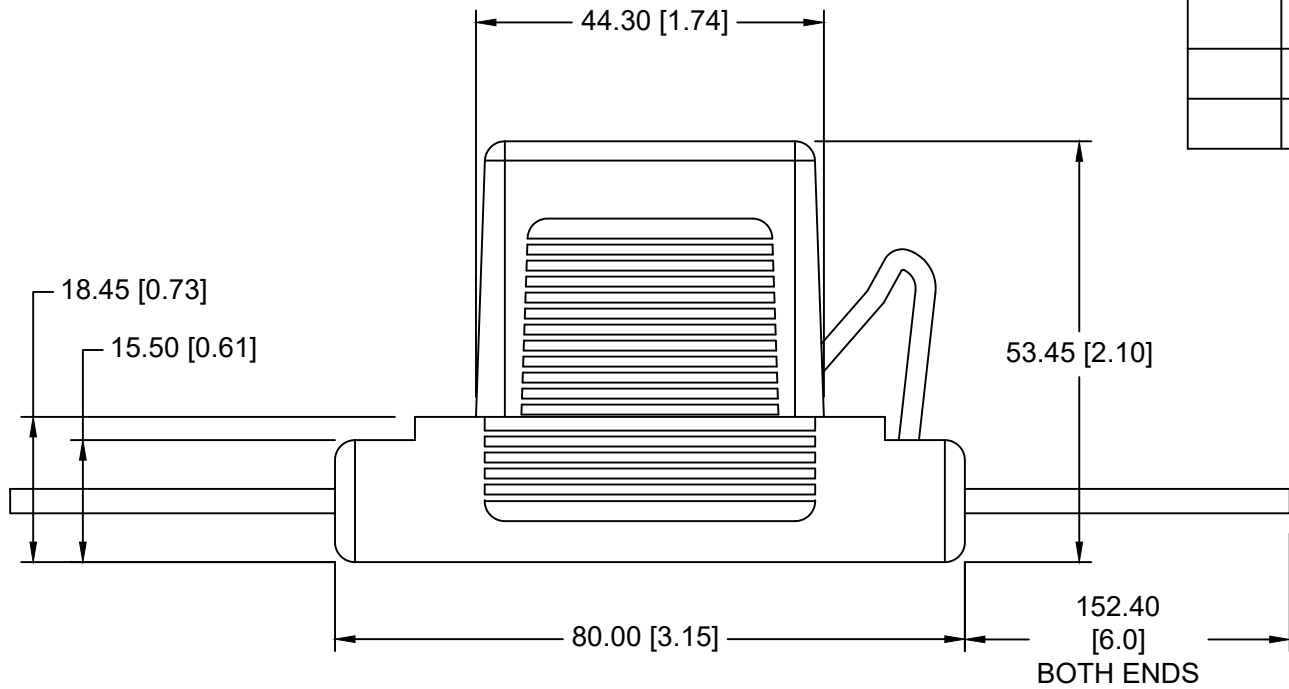

# NOTES:

1. MATERIAL:  
HOUSING : PVC ,UL94V-0, FLEX 60GPVC, UL FILE NO. E506788
  2. WIRE: RED WIRE, 8 AWG, UL 1015 600V, 105°C,  
FLAME RATED VW-1, UL FILE NO E193578 / E250011 OR  
ENGINEERING APPROVED EQUIVALENT
  3. RATED CURRENT: 60A
  4. ACCEPTS MAXI/ATX FUSES
  5. INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
  6. CONTACT RESISTANCE: 5mΩ AT 1A DC
  7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 2000V MIN
- ROHS COMPLIANT

|                                |                                                                                                                                                                           |                          |                                            |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------|
| Tolerance<br>(Except as noted) | <div> <div> <div></div> <div>MPD</div> </div> <div> <div>Memory Protection Devices, Inc</div> <div>200 Broad Hollow Road, Farmingdale, New York 11735</div> </div> </div> |                          |                                            |
| decimal<br>±.5 (.020)          |                                                                                                                                                                           |                          | Scale<br>Drawn By B.S.<br>Approved By T.B. |
| Fractional<br>± .8 (.030)      | Title<br>INLINE FUSE HOLDER                                                                                                                                               |                          |                                            |
| Angular<br>± 3°                | Date<br>11/26/19                                                                                                                                                          | Drawing Number<br>BF353L |                                            |