Date	SYM	REVISION RECORD	AUTH	DR.	CK.
01/19/18	A	Added "Water Resistance Type"	T.B.	B.S.	
04/12/19	B	Updated to "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	C	Was rated 30 amp. Dim. 152.40 was 130.18	T.B.	B.S.	
11/10/23	D	Dim. 138.0 was 152.40 Din. 54.80 was 44.30 Dim. 24.60 was 24.30 Dim. 8.10 was 7.35 Updated Specifications	D.L.	B.S.	

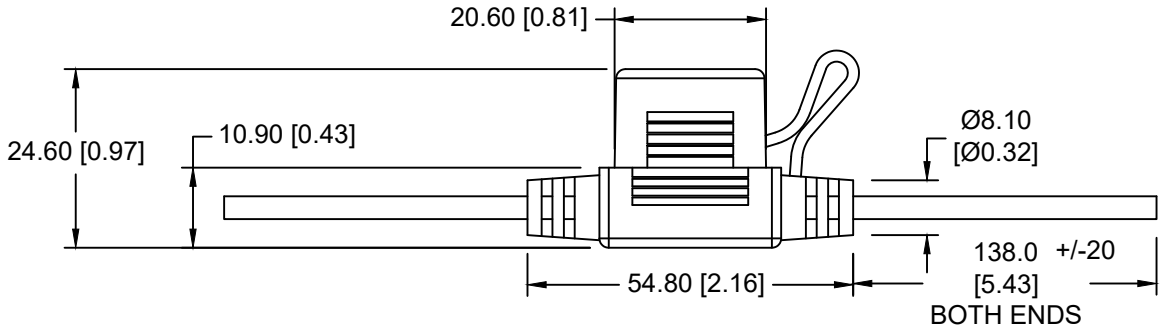

WATER RESISTANT TYPE

NOTES:

1. MATERIAL:
HOUSING : PVC ,94v-0 FLEX 60GPVC, UL FILE NO. E506788,
2. WIRE: RED WIRE, 12~16 AWG, 600V, 105°C,
FLAME RATED VW-1, UL# E250011 OR ENGINEERING
APPROVED EQUIVALENT
3. RATED CURRENT: 30A
4. ACCEPTS ATM/ASP FUSES
5. INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
6. CONTACT RESISTANCE: 5mΩ AT 1A DC
7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1000V MIN
ROHS COMPLIANT
8. Wires + Overmold: DC 32V Max.
9. Contact/Terminal are brass without plating

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER		
Angular ± 3°	Date 11/10/23	Drawing Number BF353S	