Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/12/19	A	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	B	WAS RATED 20AMP. ADDED WIRE LENGTH	T.B.	B.S.	

HINGED BODY TYPE

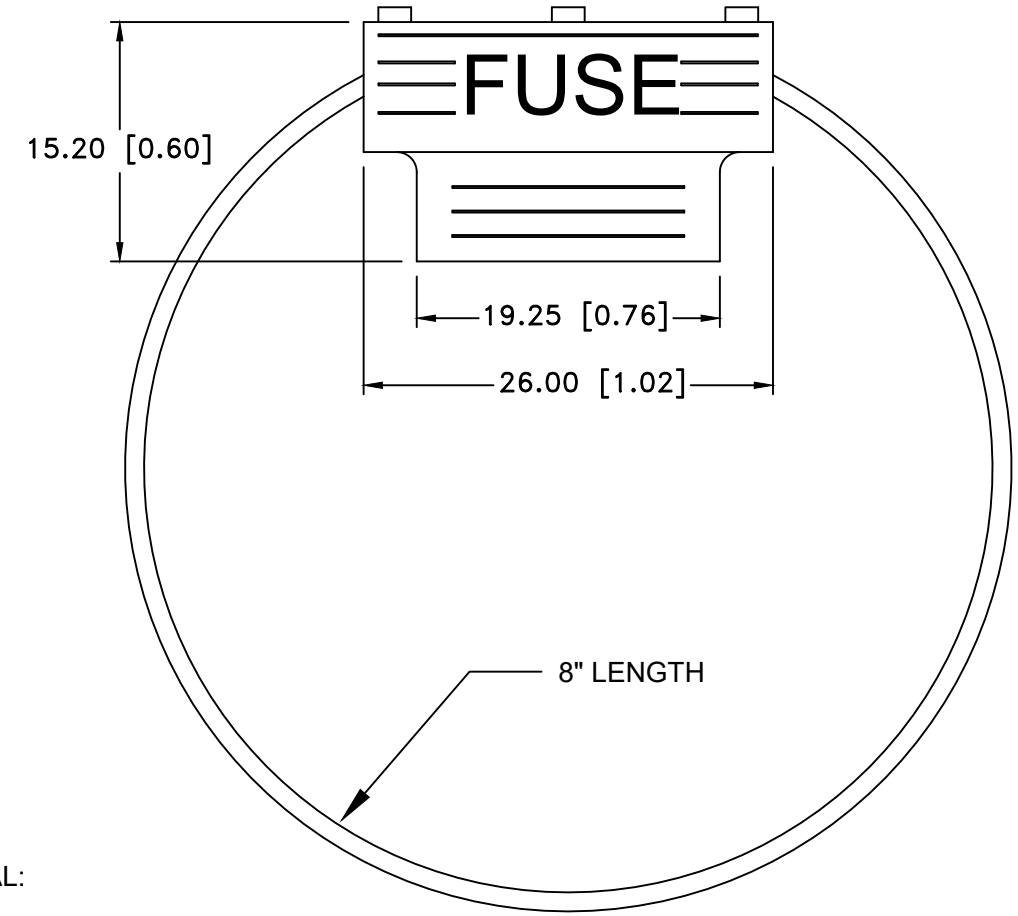

NOTES:

1. MATERIAL:

   HOUSING : NYLON 66, UL 94V-2, UL FILE NO. E41938

2. LEAD WIRE IN LOOP: RED WIRE, 16AWG, UL-1015, 600V, 105°C, FLAME RATING VW-1, UL FILE NO. E250011, OR ENGINEERING APPROVED EQUIVALENT
3. RATED CURRENT: 15A
4. ACCEPTS ATP/ATC/ATO FUSES
5. INSULATION RESISTANCE AT 500V DC: 100M Ω MIN
6. CONTACT RESISTANCE: 5m Ω AT 1A DC
7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN

ROHS COMPLIANT

8. Wires + Overmold: DC 32V Max.
9. Contact/Terminal are brass without plating

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER		
Angular ± 3°	Date 11/26/19	Drawing Number BF355	