
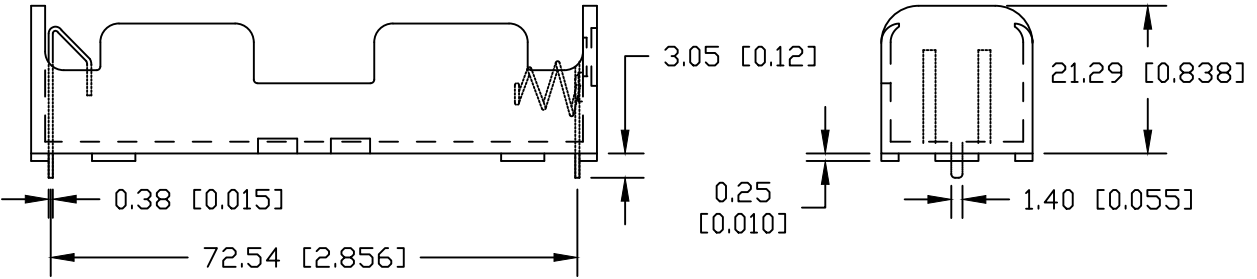


PCB LAYOUT


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

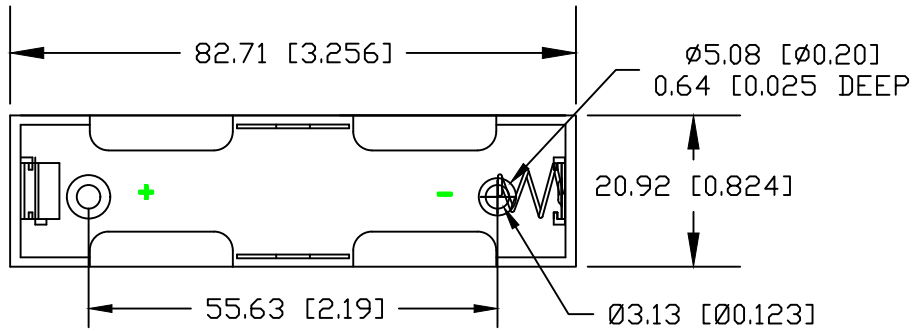

NOTES:

Material: Polypropylene, UL94V-0, UL file No. E255317  
 Contacts: 302 Stainless Steel Spring Temper, Nickel Plated  
 Heat Deflection Temperature: 90°C  
 Vibration Test: 10-50-10 Hz swept in 60 seconds  
 X,Y,Z direction: 1 hour each direction  
 Result: No dislodgement of the cell or damage  
 No discontinuity over 10 micro-seconds  
 Shock Test: Half sine wave acceleration 150G. 6 ms  
 3 shock pulses each direction per axis, total of 18 pulses  
 Result: No evidence of physical damage.  
 ROHS COMPLIANT

This battery holder is designed for use with protected 18650 batteries (PCB)

Tolerance (Inches)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	Decimal ±.5 (.020)	ONE 18650 LI-ION CELL HOLDER	Scale Drawn By B.S. Approved By D.L.
Fractional ± .8 (.030)	Title NEW EXTENDED HOLDER FOR 70mm 18650 BATTERY WITH PROTECTED CELL BATTERY		
Angular ± 3°	Date 06/01/26	Drawing Number BH-18650-PC-E	