


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

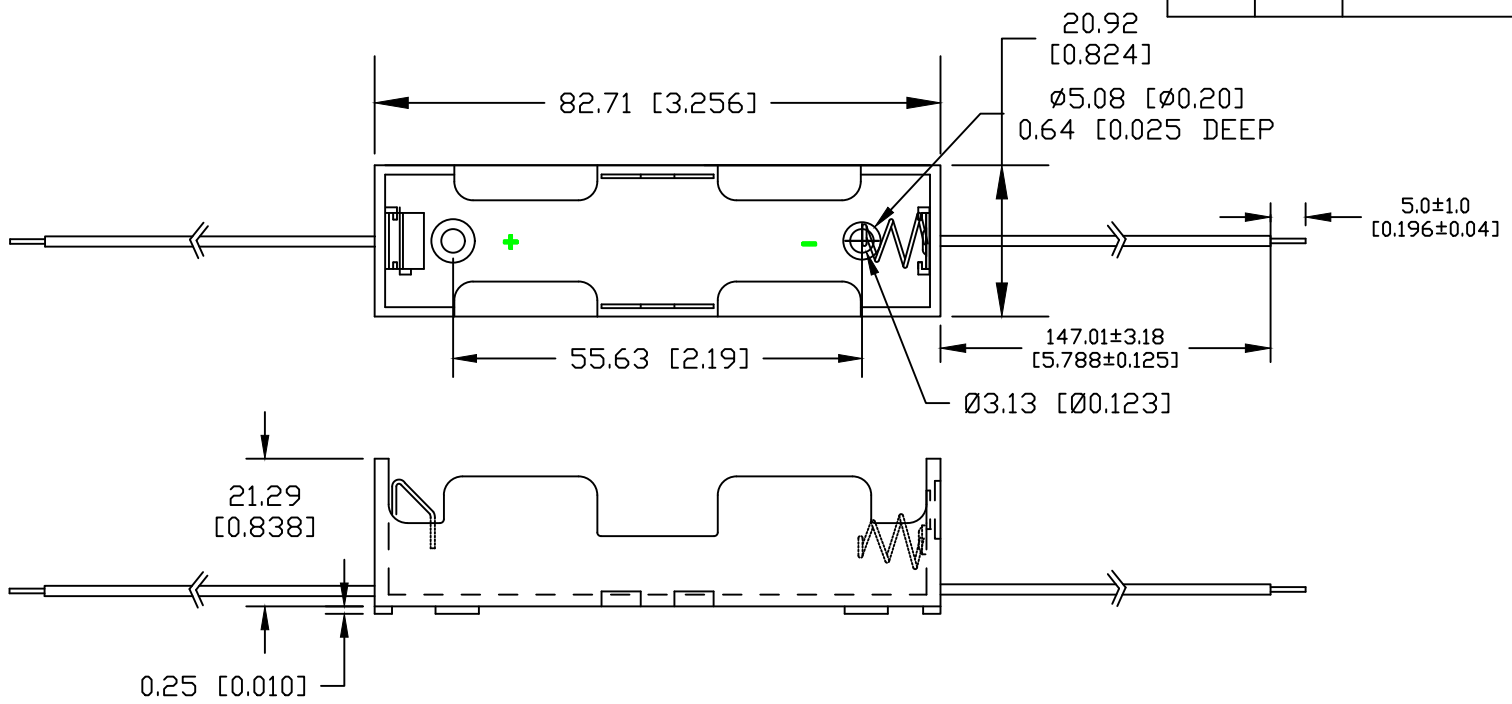


NOTES:

Material: Polypropylene, UL94V-0, UL file No. E255317
 Contacts: 302 Stainless Steel Spring Temper, Nickel Plated
 Heat Deflection Temperature: 90°C
 Vibration Test: 10-50-10 Hz swept in 60 seconds
 X,Y,Z direction: 1 hour each direction
 Result: No dislodgement of the cell or damage
 No discontinuity over 10 micro-seconds
 Shock Test: Half sine wave acceleration 150G. 6 ms
 3 shock pulses each direction per axis, total of 18 pulses
 Result: No evidence of physical damage.
 ROHS COMPLIANT

This battery holder is designed for use with protected 18650 batteries (PCB)

ONE 18650 LI-ION CELL HOLDER WITH WIRE LEADS

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ±.8 (.030)	Title NEW EXTENDED HOLDER FOR 70mm 18650 BATTERY WITH PROTECTED CELL BATTERY		
Angular ± 3°	Date 06/01/26	Drawing Number BH-18650-W-E	
		Approved By D.L.	