


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/22/24	F	Updated UL file number	D.L.	B.S.	
01/29/25	G	Dim. .66 was .656 Dim. .025x.030 was .025x.029 Added Dim. .275, .679, .27 Updated specification notes	D.L.	B.S.	

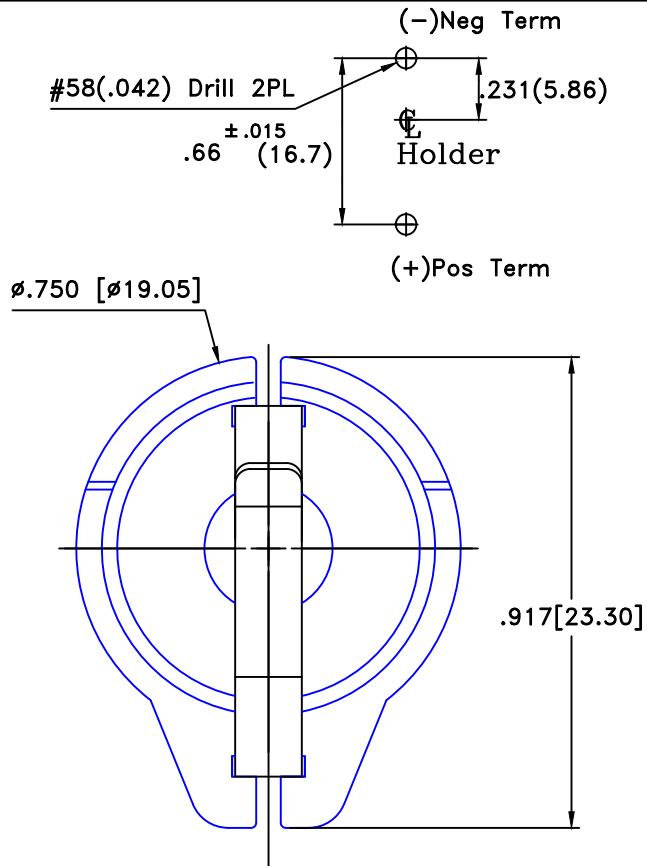

Estimated Weight: 1.69000708 g

Specifications:

Holder material- Thermoplastic, Black PBT

Flammability Rating - UL94V-0, File no. E53664

Contacts - 302 spring temper stainless steel, Gold Flash Finish

Dielectric strength - 560volts/mil at 25°C for 5 seconds


Temperature range - -55°C to +180°C

Resistance to solvents - Xylene, ethyl, butyl, methyl & proptl alcohol, ethyl acetate, heptane, toluene, refrigerant

Approximate weight: 1.68g

ROHS Compliant

Positive contact may touch the negative contact. This is acceptable.

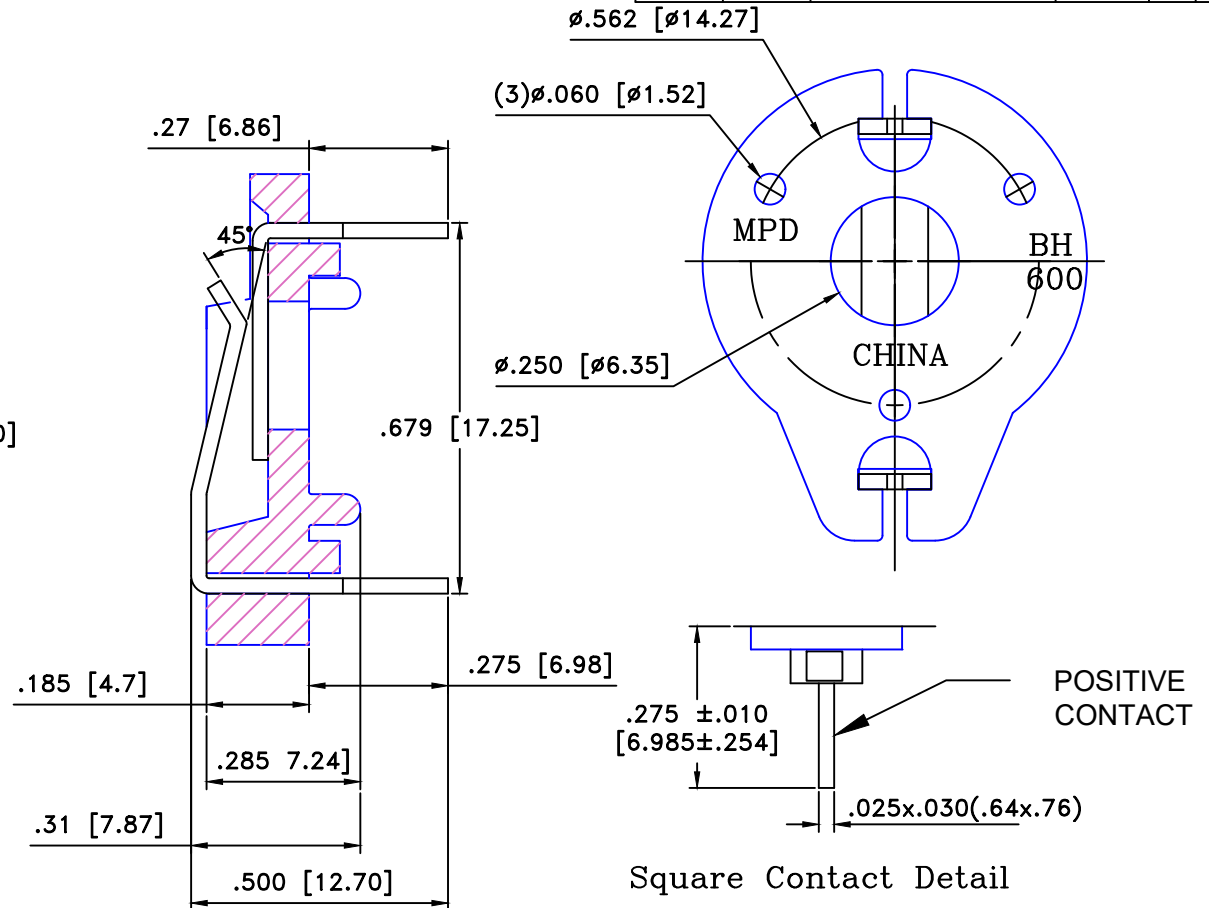

Square Contact Detail

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale 4=1	Drawn By B.S. Approved By D.L.
Fractional $\pm .8$ (.030)	Title BR/CR/DL 1620/1632 COIN BATTERY HOLDER		
Angular $\pm 3^\circ$	Date 01/29/25	Drawing Number BH600-G	