
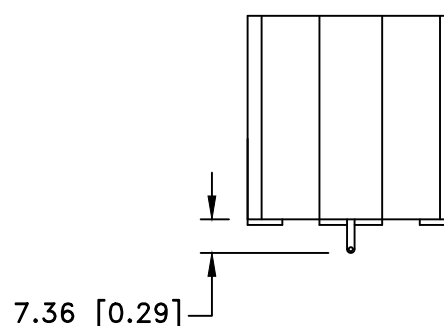
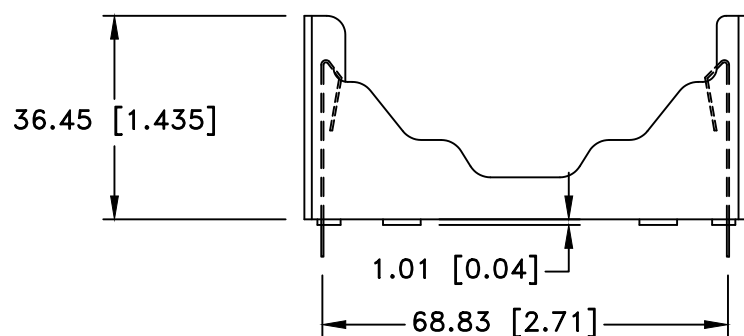
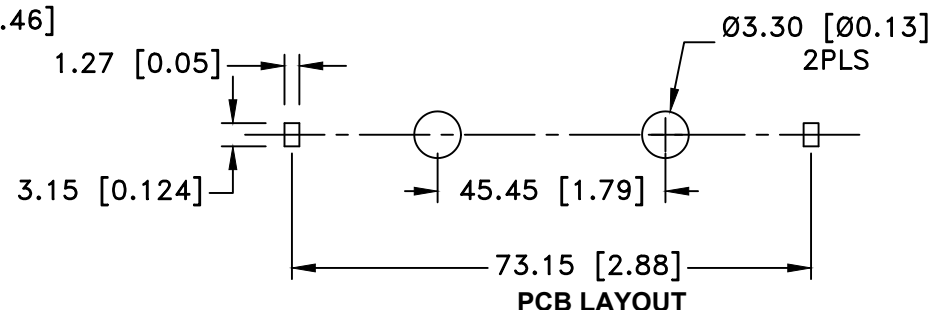


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
8/20/10	A	Added Temperature Range	T.B.	B.S.	
6/13/14	B	Updated to RHOS 2 Compliant	T.B.	B.S.	
9/04/15	C	Updated Title	T.B.	B.S.	
4/09/25	D	Dim. 68.83 was 73.15	D.L.	B.S.	

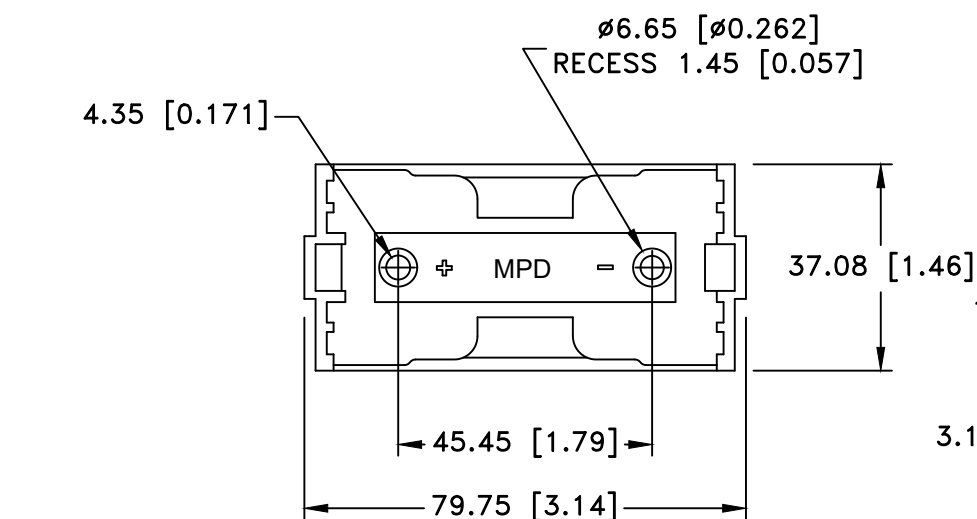

NOTES:

MATERIAL:

Holder: PBT, 30% Glass, Black, UL94V-0

Temperature Range: -55°C TO +180°C

Contacts: 302 Stn. Stl., Spring temper, Nickel Plated Overall

Vibration Test: 10-50-10 Hz swept in 60 seconds

X,Y,Z direction: 1 hour each direction, No dislodgement

of the cell or damage, No discontinuity over 10 micro-seconds

Shock Test: Half sine wave acceleration 150g. 6 milliseconds, 1

shock pulses each direction per axis, total of 6 pulses,

No evidence of physical damage

ROHS COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc		
	200 Broad Hollow Road, Farmingdale, New York 11735		
decimal		Scale	Drawn By B.S.
±.5 (.020)			Approved By D.L.
Fractional	Title		
± .8 (.030)	D CELL HOLDER WITH PC PINS		
Angular	Date	Drawing Number	
± 3°	04/09/25	BHD-2	