

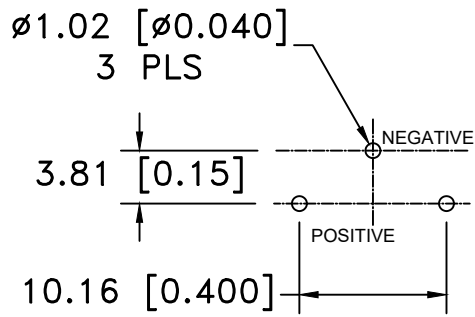


| Date     | SYM | REVISION RECORD   | AUTH | DR.  | CK. |
|----------|-----|---|------|------|-----|
| 09/06/23 | D   | Dim. 5.08 was 5.00<br>Dim. 10.16 was 10.00<br>Dim. 3.81 was 3.60<br>Updated View        | D.L. | B.S. |     |
| 01/29/25 | E   | Dim. 23.37 was 23.39<br>Dim. 12.19 was 12.14<br>Added Dim. 1.016<br>UL file no. changed | D.L. | B.S. |     |

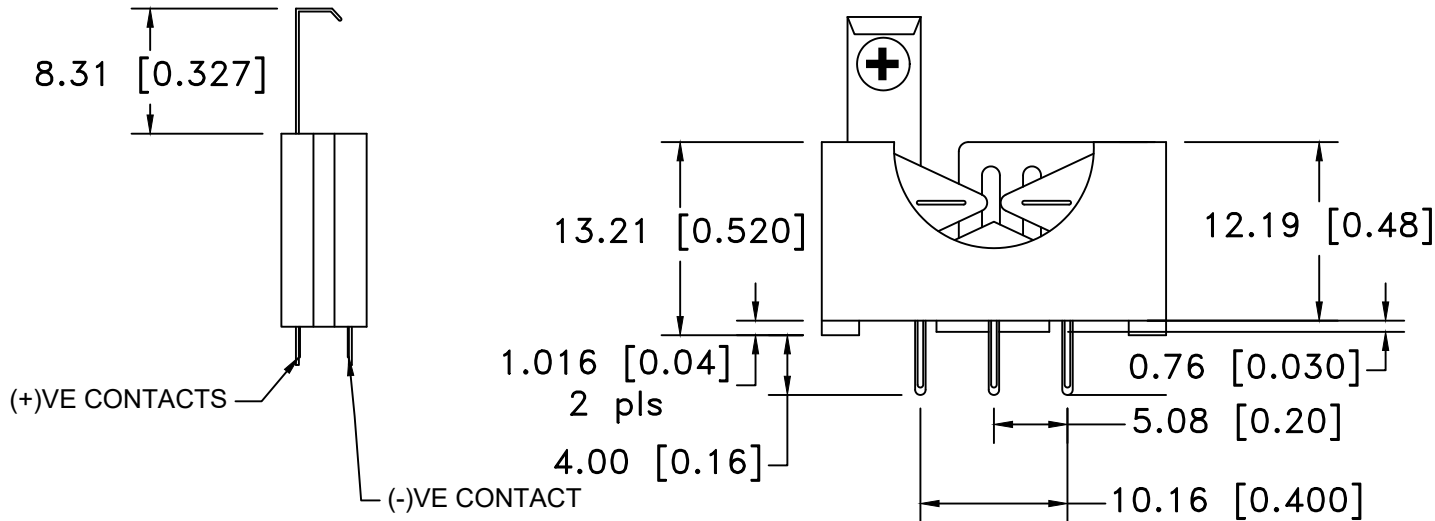


PCB LAYOUT

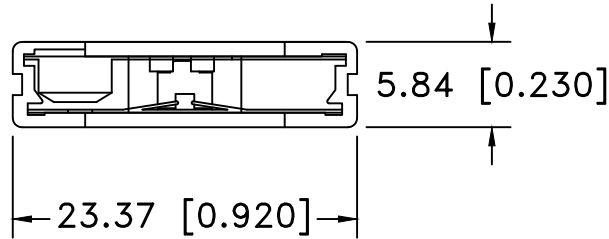

Weight: 1.65g

NOTES:

MATERIAL: GLASS FILLED NYLON 66, UL94V-0  
 COLOR BLACK, UL FILE NO. E245249  
 CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED  
 ELECTRICAL :  
 VOLTAGE: 250V AC  
 CONTACT RESISTANCE: 30mΩ MAX  
 INSULATION RESISTANCE: 1000mΩ AT DC 500V  
 DIELECTRIC STRENGTH: AC 1000V PER MINUTE  
 TEMPERATURE RANGE: -40°C TO +200°C  
 ROHS COMPLIANT

|                                |   |                               |  |
|--------------------------------|---|-------------------------------|--|
| Tolerance<br>(Except as noted) |  <b>Memory Protection Devices, Inc</b><br>200 Broad Hollow Road, Farmingdale, New York 11735 |                               |  |
| decimal<br>±.5 (.020)          | Scale   | Drawn By B.S.                 |  |
| Fractional<br>± .8 (.030)      | Title<br>BR/CR/DL 2032 VERTICAL BATTERY HOLDER, 3 PINS  |                               |  |
| Angular<br>± 3°                | Date<br>01/29/25  | Drawing Number<br>BK-5058-4MM |  |
|                                |   | Approved By D.L.              |  |