
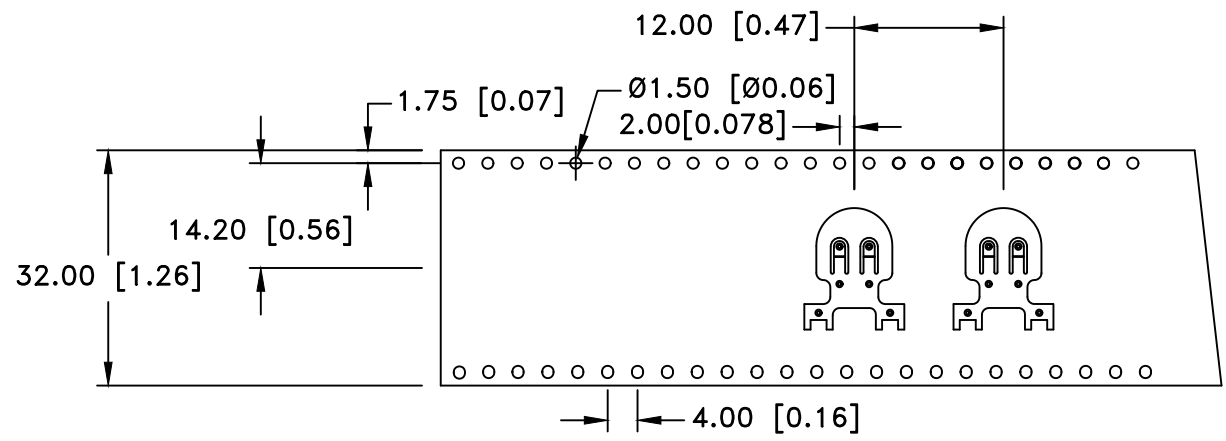



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|------|-----|-----------------|------|-----|-----|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

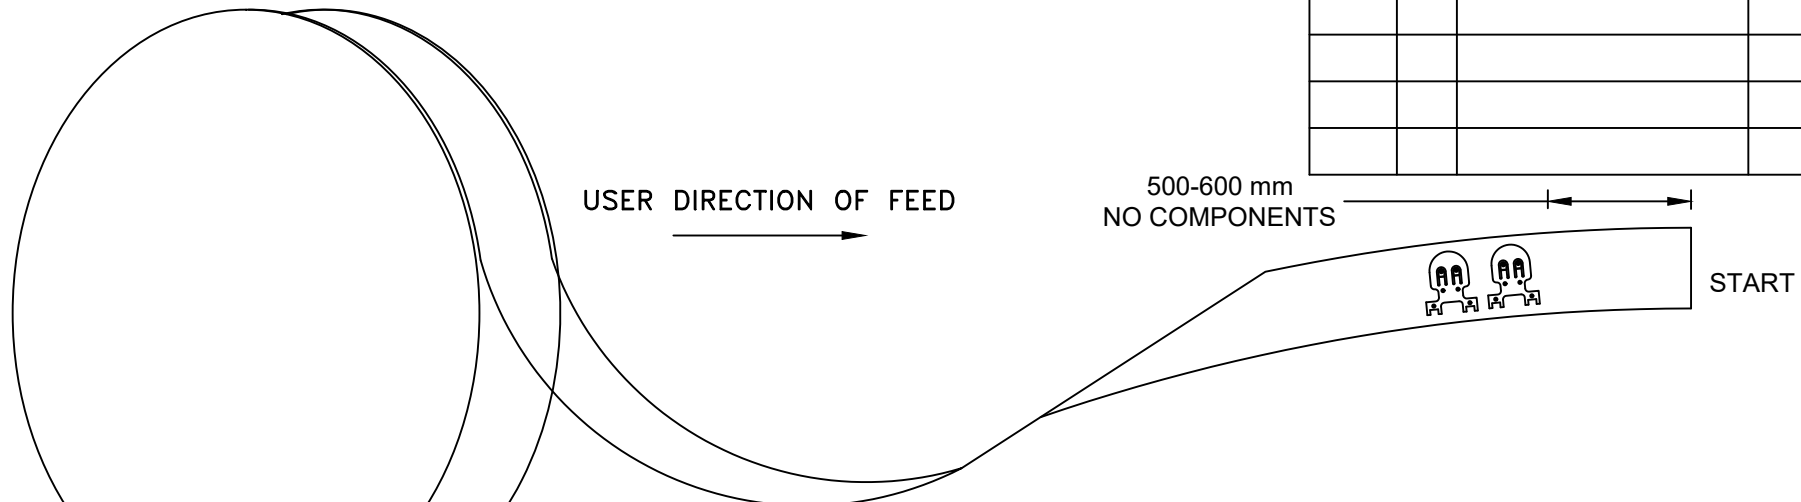

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance ± 0.20 mm
2. Carrier camber not to exceed 1mm in 100mm
3. Material: PS Transparent Anti-static Polystyrene
4. Thickness: 0.30 ± 0.05 mm
5. Component loader per 13" reel: 1800 pcs
6. All dimensions per EIA-481-C

ROHS COMPLIANT

| | | | |
|--------------------------------|---|---------------------------------|-----------------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| | decimal $\pm .5$ (.020) | Scale | Drawn By B.S. Approved By D.L. |
| Fractional $\pm .8$ (.030) | Title TAPE AND REEL SPECIFICATION FOR BC-2019 NEGATIVE CONTACT | | |
| Angular $\pm 3^\circ$ | Date 04/17/26 | Drawing Number BC-2019-TR-99 | |