

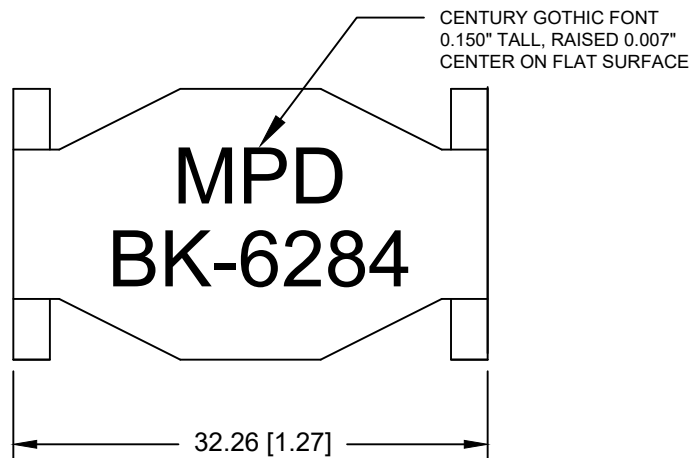


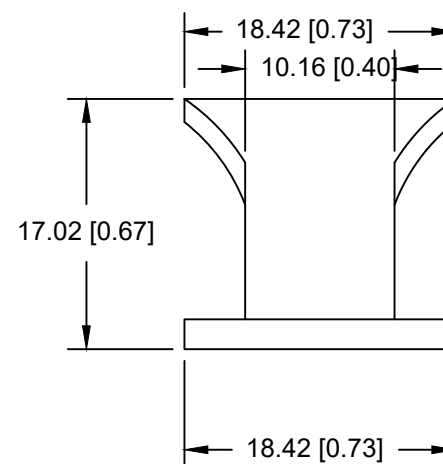

Date	SYM	REVISION RECORD	AUTH	DR.	CK.

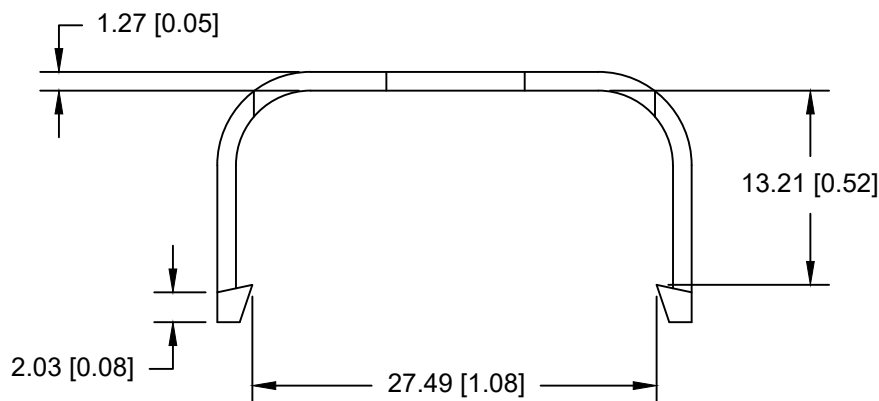

NOTES:

Material: ABS, PA-765, UL94V-0, POLYLAC BLACK
 Tested with part #BK-6284
 Vibration Test: 10-55-10 Hz swept in 60 seconds
 X,Y,Z direction: 1 hour each direction
 Result: No dislodgement of the cell or damage
 Shock Test: Half sine wave acceleration 80G. 6 micro-seconds
 3 shock pulses each direction per axis
 Result: No evidence of physical damage.
 Drop Test: Mounted on board and dropped 1 time, 1 side from 1 m.
 high to wooden floor.
 Result: No dislodgement or physical damage of any cells.

Tolerance (Inches)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By D.L.
Fractional ± .8 (.030)	Title AA SURFACE MOUNT HOLDER 2 AA CELL SM STRAP		
Angular ± 3°	Date 05/08/25	Drawing Number BK-6284-COVER	