


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/08/25	A	REMOVED KEYING PED ADDED OPTIONAL STRAP	D.L.	B.S.	

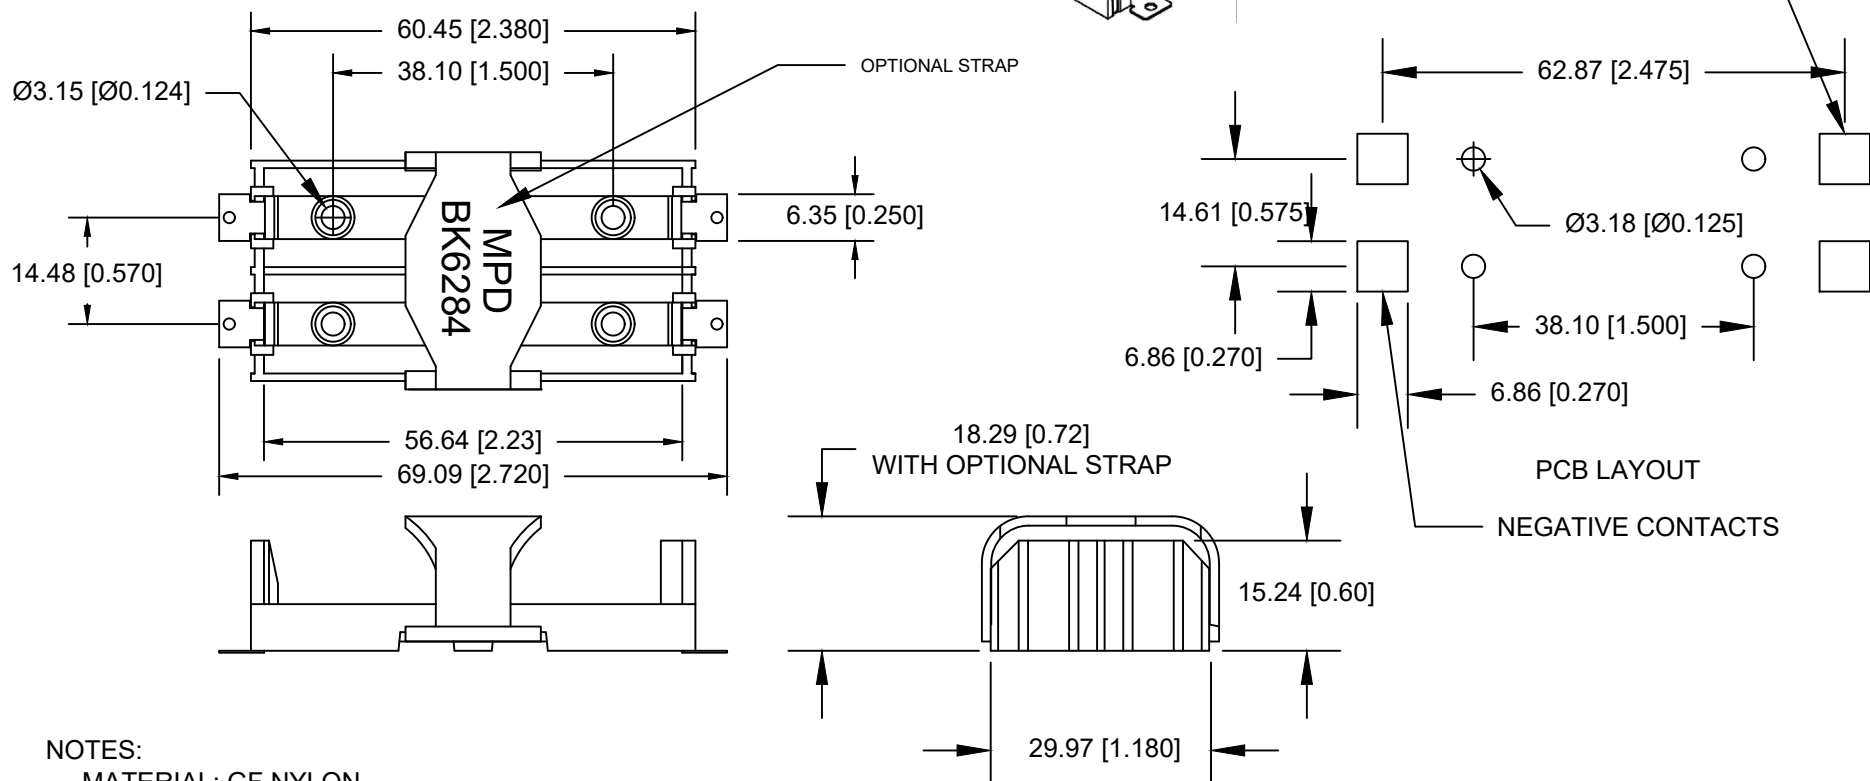

NOTES:

MATERIAL: GF NYLON
 CONTACT MATERIAL: SPRING STEEL
 CONTACT FINISH: NICKEL
 OPTIONAL STRAP: EXTRA FORCE MAY BE REQUIRED TO LOCK STRAP IN PLACE WHEN USING OFF BRAND BATTERIES
 ROHS COMPLIANT

MOUNTING HARDWARE RECOMMENDATIONS:

1. # 4 SCREWS
2. M3 SCREWS
3. EYELETS 0.118" OD BY 0.200" FLANGE
4. STIMPSON GS-4 SERIES OR EQUIVALENT
5. ADHESIVES COMPATABLE WITH REFLOW PROCESS

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title 2 -AA SURFACE MOUNT BATTERY HOLDER		
Angular ± 3°	Date 05/08/25	Drawing Number BK-6284	
		Approved By	D.L.