
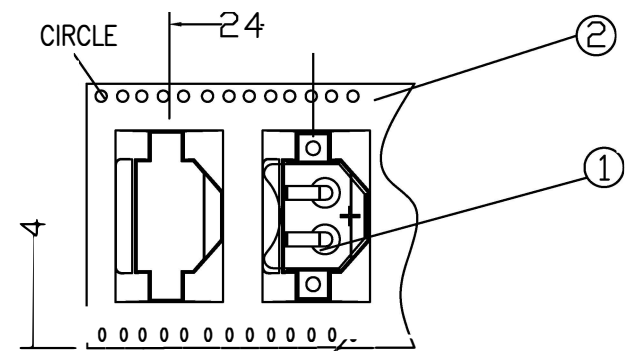


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

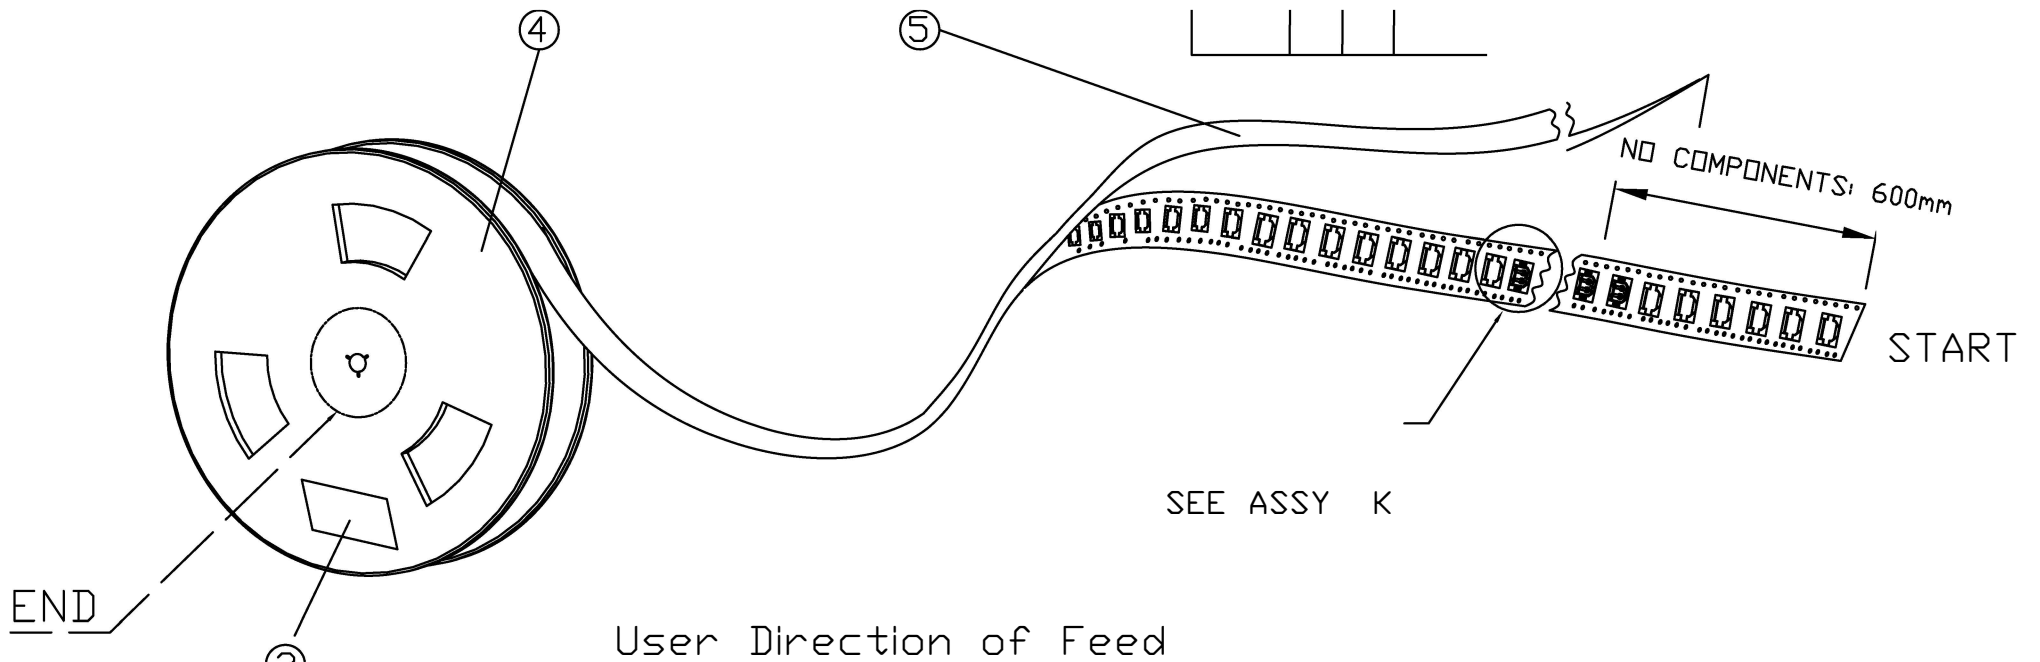


User Direction of Feed

② Qty per T&R 500 pcs

- NOTES:
1. END : NO COMPONENTS DIMENSION: MIN. 200mm.
  2. ALL DIMENSION MUST BE ACCORD WITH EIA-481-2A STANDARD.
  3. THE ASSY DRAWING APPLY TO MODE NO: BK-868-TR.

ASSY K  
SCALE: 2.000

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-868		
Angular ± 3°	Date 12/29/25	Drawing Number BK-868-TR-99	