



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/04/18	A	Dim. 56.0 was 32.0	T.B.	B.S.	

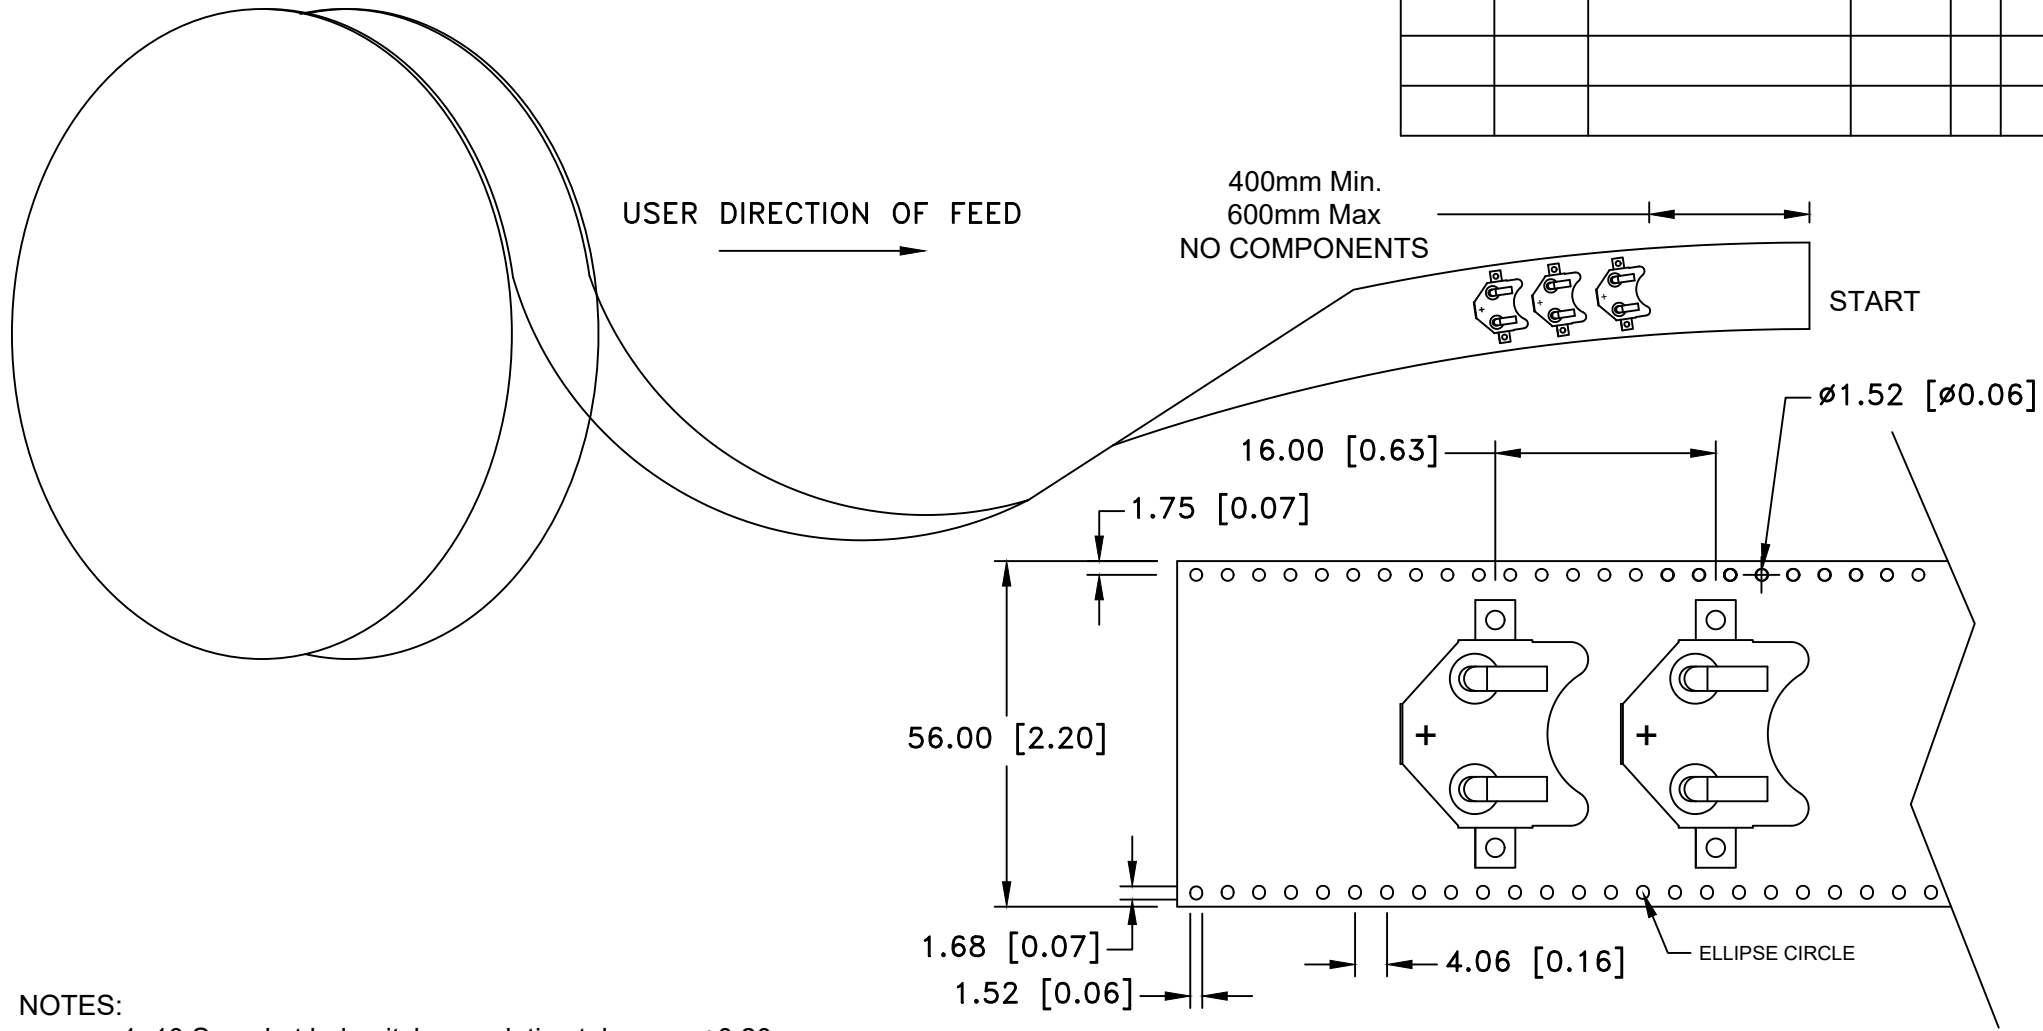

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Anti-Static 10 PS
4. Thickness:  $0.50 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 300 pcs
6. All dimensions per EIA-481-C Standard
7. ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-877		
Angular $\pm 3^\circ$	Date 05/04/18	Drawing Number BK-877-TR	