



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/14/04	A	1. ADDED DIM. FOR NO COMPONENTS AREA 2. QUANTITY 450 WAS 500	T.B.	B.S.	
10/02/04	B	1. REVISED BATTERY HOLDER VIEW TO MEET ACTUAL SAMPLE	T.B.	B.S.	
9/08/07	C	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
6/19/09	D	ADDED OVERALL DIM. 44.0	T.B.	B.S.	

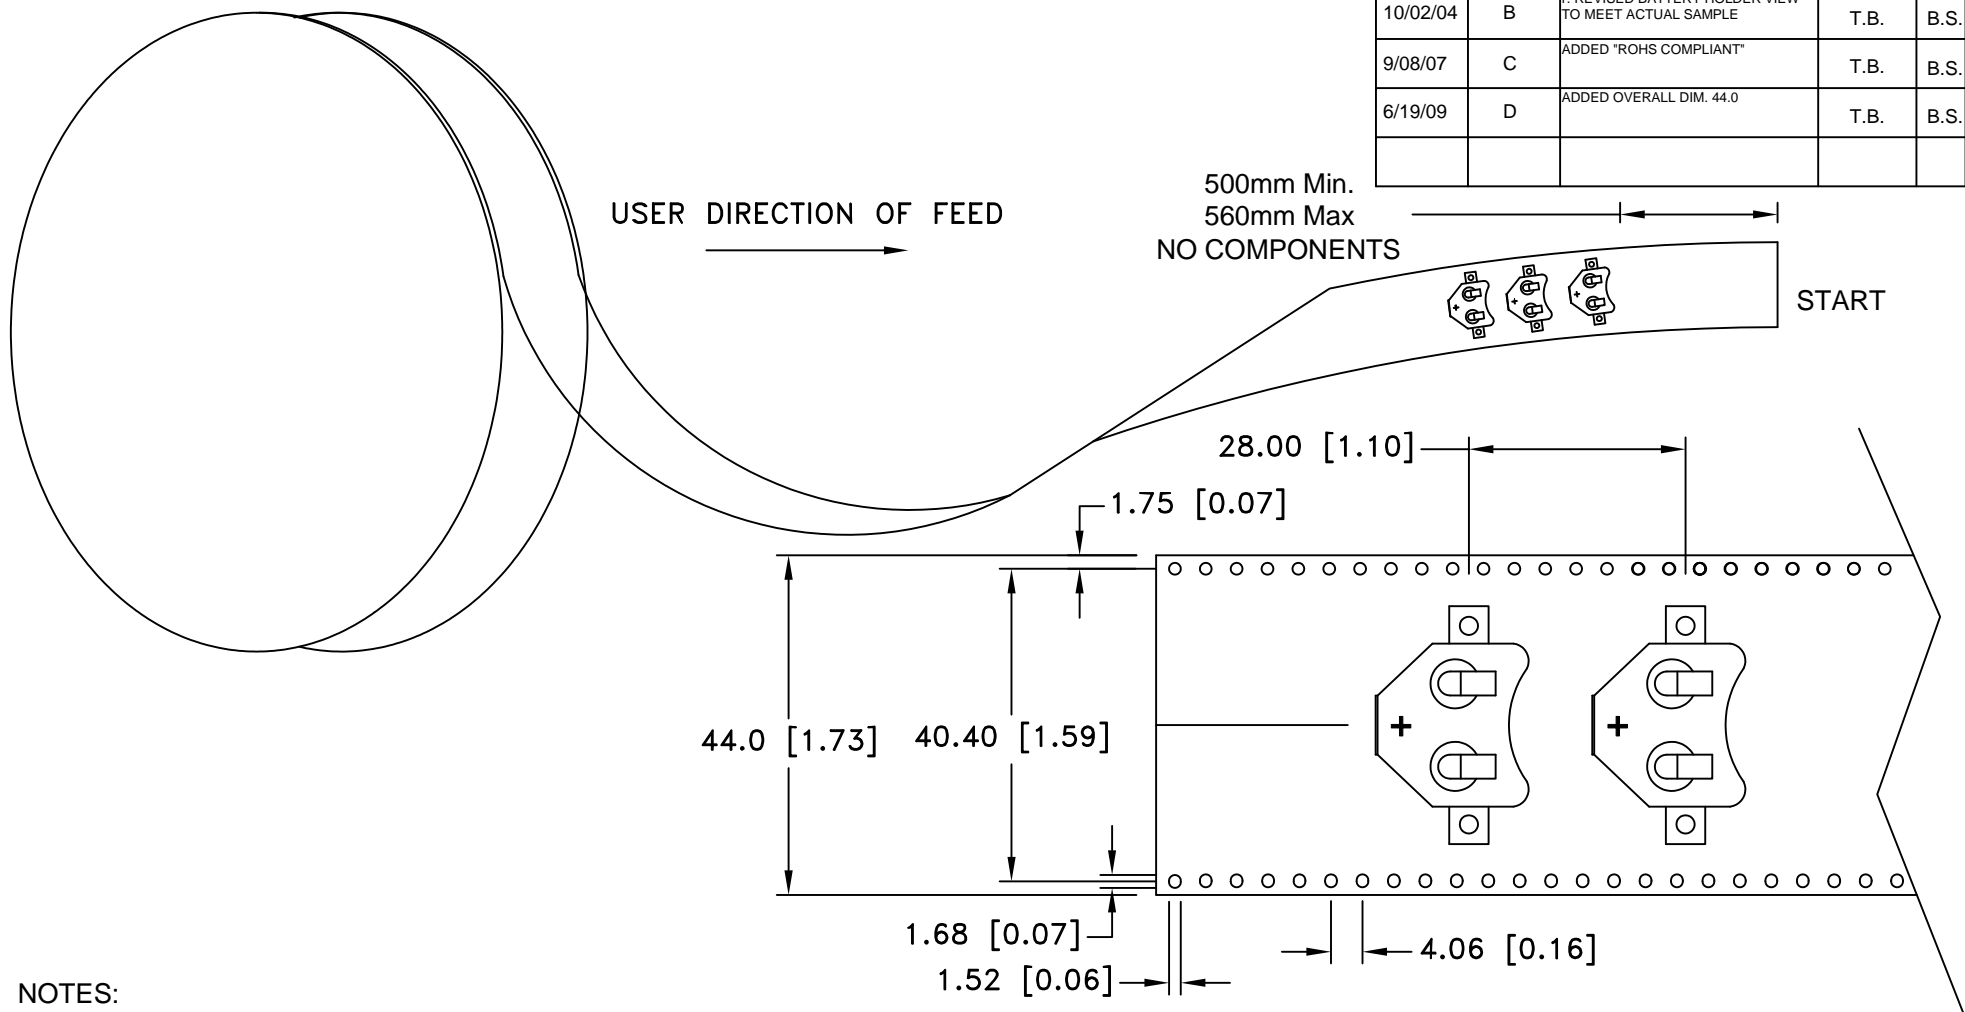

**NOTES:**

1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Black Conductive Polystyrene
4. Thickness:  $0.35 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 450 pcs
6. All dimensions per EIA-481-2A
7. ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)	Scale	Drawn By B.S.	
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-883		
Angular $\pm 3^\circ$	Date 6/19/09	Drawing Number BK-883-TR-REEL	
		Approved By T.B.	