



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/12/21	A	Dim. 24.0 WAS 28.0 Reel quantity was 450	T.B.	B.S.	

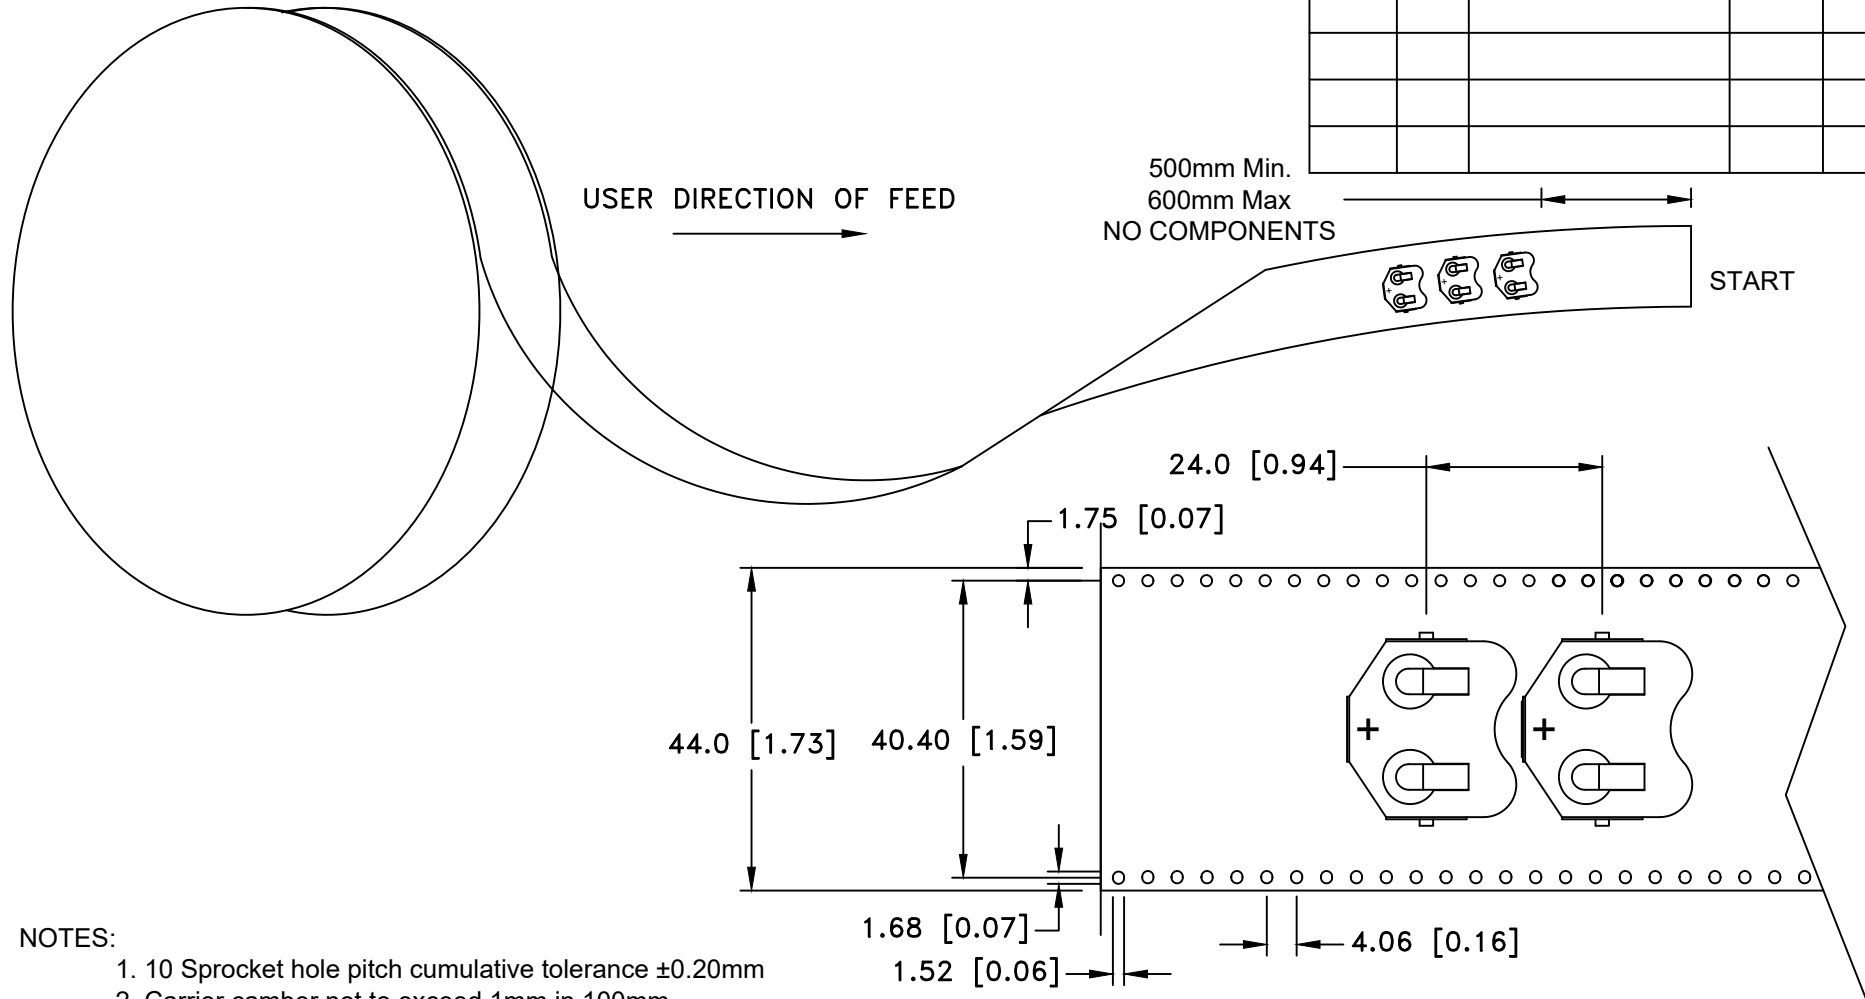

- NOTES:
- 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
 - Carrier camber not to exceed 1mm in 100mm
 - Material: Black Conductive Polystyrene
 - Thickness: $0.5 \pm 0.05\text{mm}$
 - Component loader per 13" reel: 350 pcs
 - All dimensions per EIA-481-C
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal		Scale	Drawn By B.S.
$\pm .5$ (.020)			Approved By T.B.
Fractional	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-888		
$\pm .8$ (.030)	Date	Drawing Number	
Angular	05/12/21	BK-888-G-TR	
$\pm 3^\circ$			