
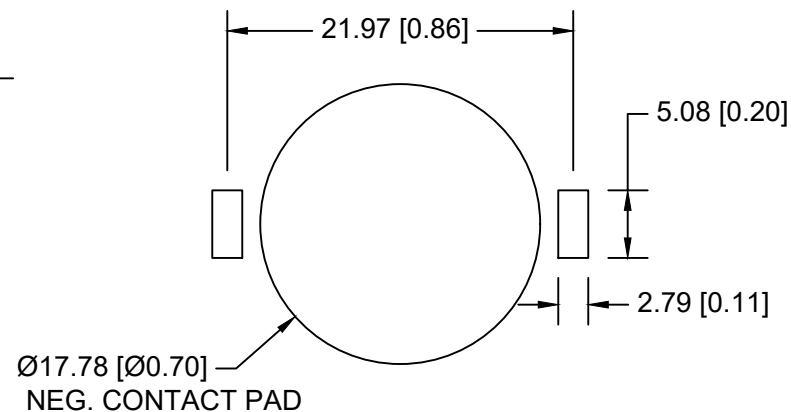


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
01/15/19	A	Updated Tolerances	T.B.	B.S.	

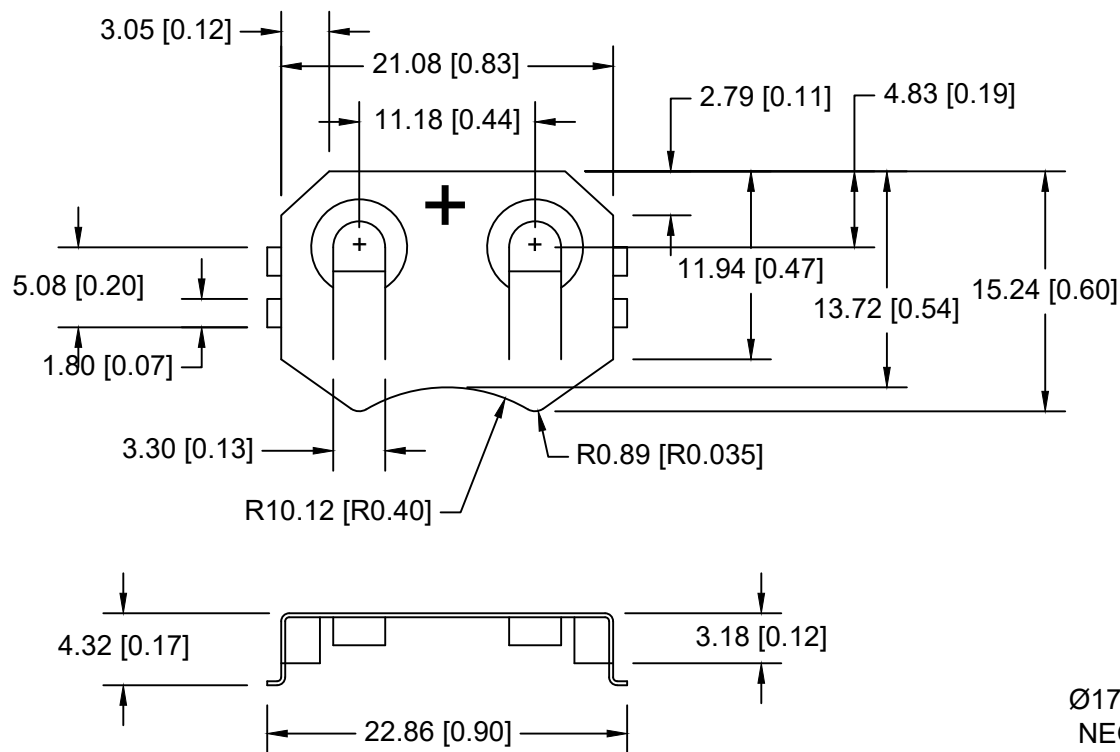

PCB LAYOUT

SPECIFICATIONS:

- * 0.25mm Phosphor Bronze, Matte Tin plated 80u"-150u"
- * Temperature Range: -40°C to +270°C
- * Vibration test: 10-50-10 hz swept in 60 seconds
x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
no discontinuity over 10 micro-seconds
- * Shock test: half sine wave acceleration 150g.
6 m/s 3 shock pulses each direction per axis,
total of 18 pulses
- * Result: no evidence of physical damage
- * ROHS 2 COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
decimal ±.5 (.020)			Scale	Drawn By B.S.
				Approved By T.B.
Fractional ± .8 (.030)	Title CR2032 BATTERY RETAINER, SMD			
Angular ± 3°	Date 01/15/19	Drawing Number BK-912-SN-TR		