



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

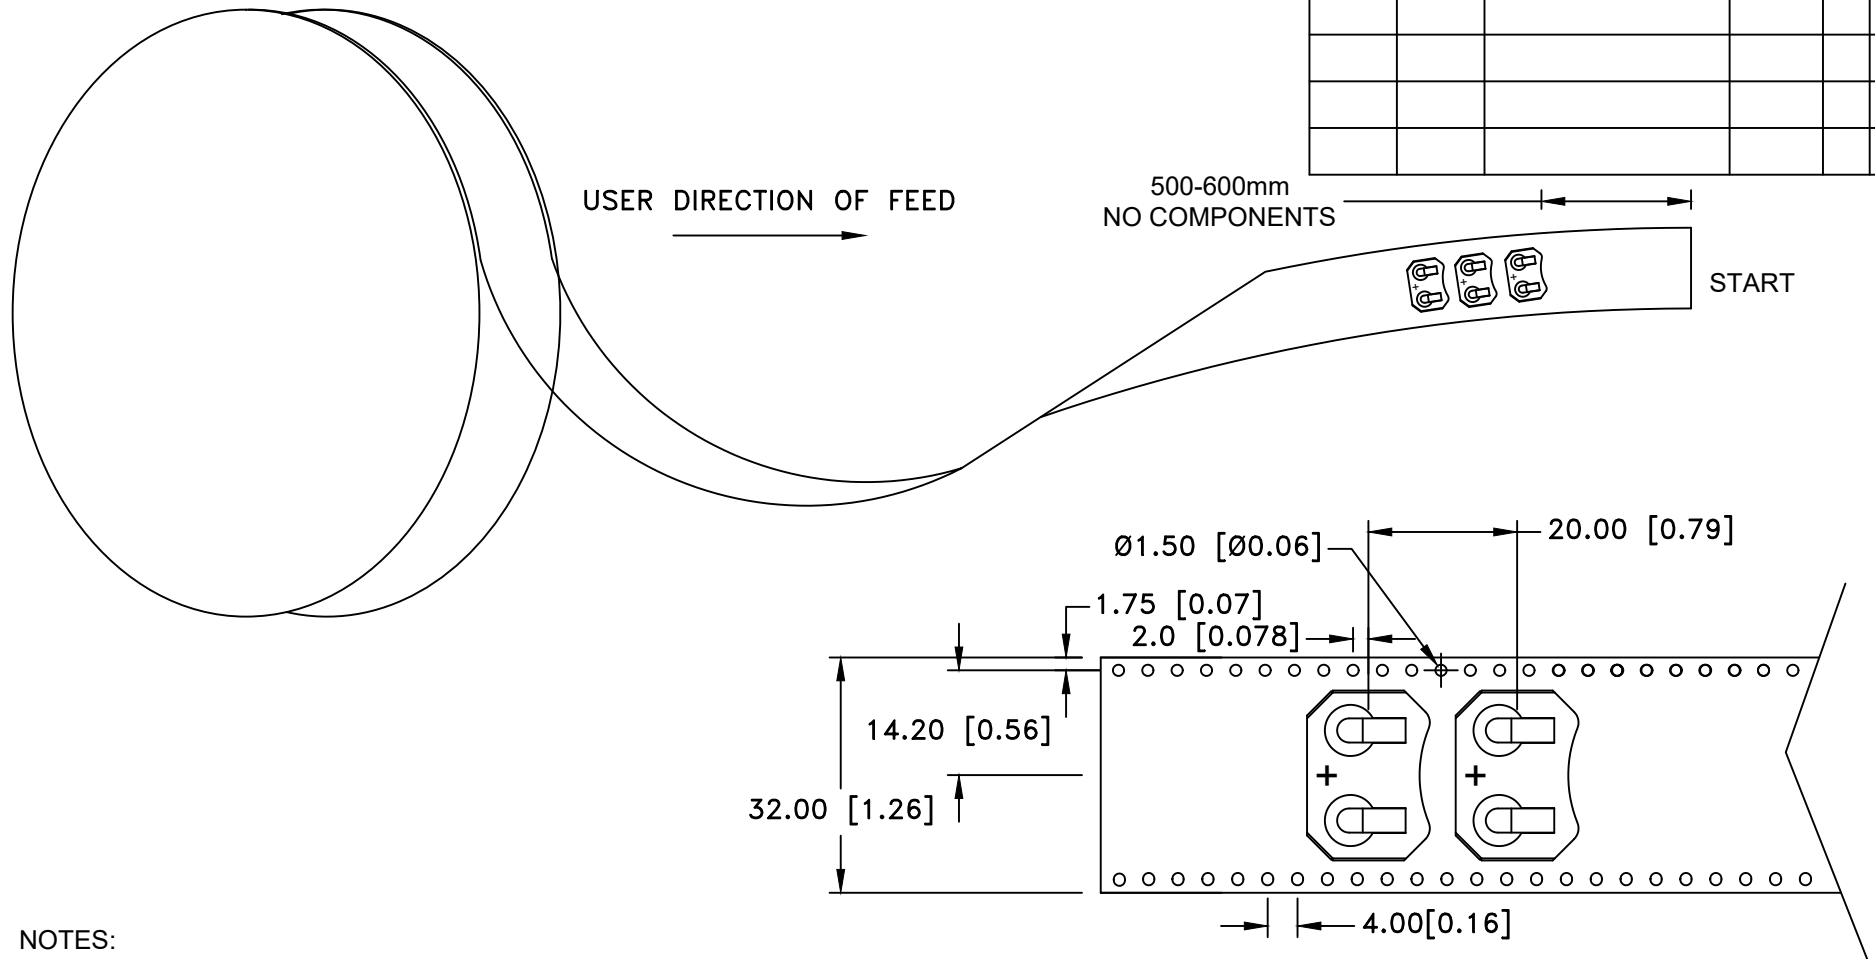

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance ± 0.20 mm
2. Carrier camber not to exceed 1mm in 100mm
3. Material: Black Anti-static Polystyrene
4. Thickness: 0.35 ± 0.05 mm
5. Component loader per 13" reel: 500 Pcs.
6. All dimensions per EIA-481-C

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal	Scale	Drawn By B.S.
$\pm .5$ (.020)			Approved By D.L.
Fractional	Title TAPE AND REEL SPECIFICATION FOR		
$\pm .8$ (.030)	SURFACE MOUNT BATTERY HOLDER FOR BK-913-5		
Angular	Date	Drawing Number	
$\pm 3^\circ$	04/17/26	BK-913-5-TR-99	