



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

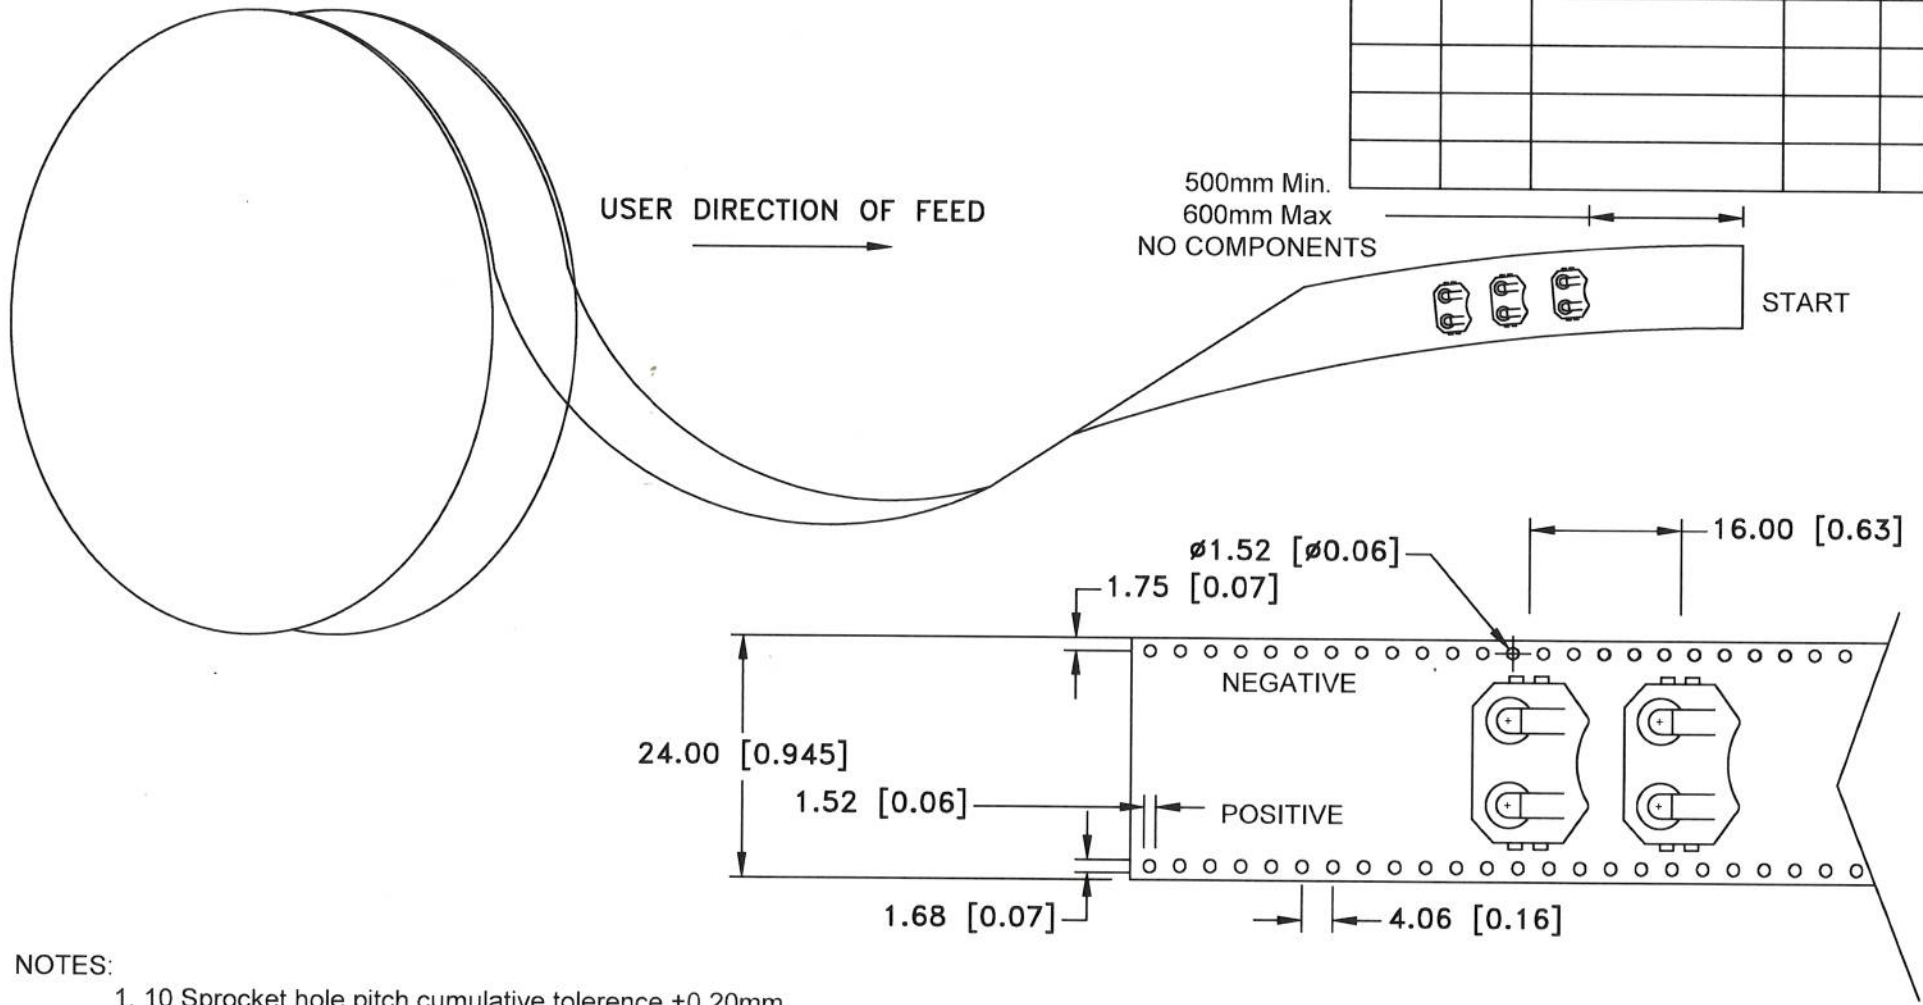

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 100mm
3. Material: Transparent Anti-static Polystyrene
4. Thickness: $0.35 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 1000pcs
6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal	Scale	Drawn By B.S.
$\pm .5$ (.020)			Approved By T.B.
Fractional	Title TAPE AND REEL SPECIFICATION FOR		
$\pm .8$ (.030)	SURFACE MOUNT BATTERY HOLDER FOR BK-916 -TR		
Angular	Date	Drawing Number	
$\pm 3^\circ$	08/14/18	BK-916-TR	