


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

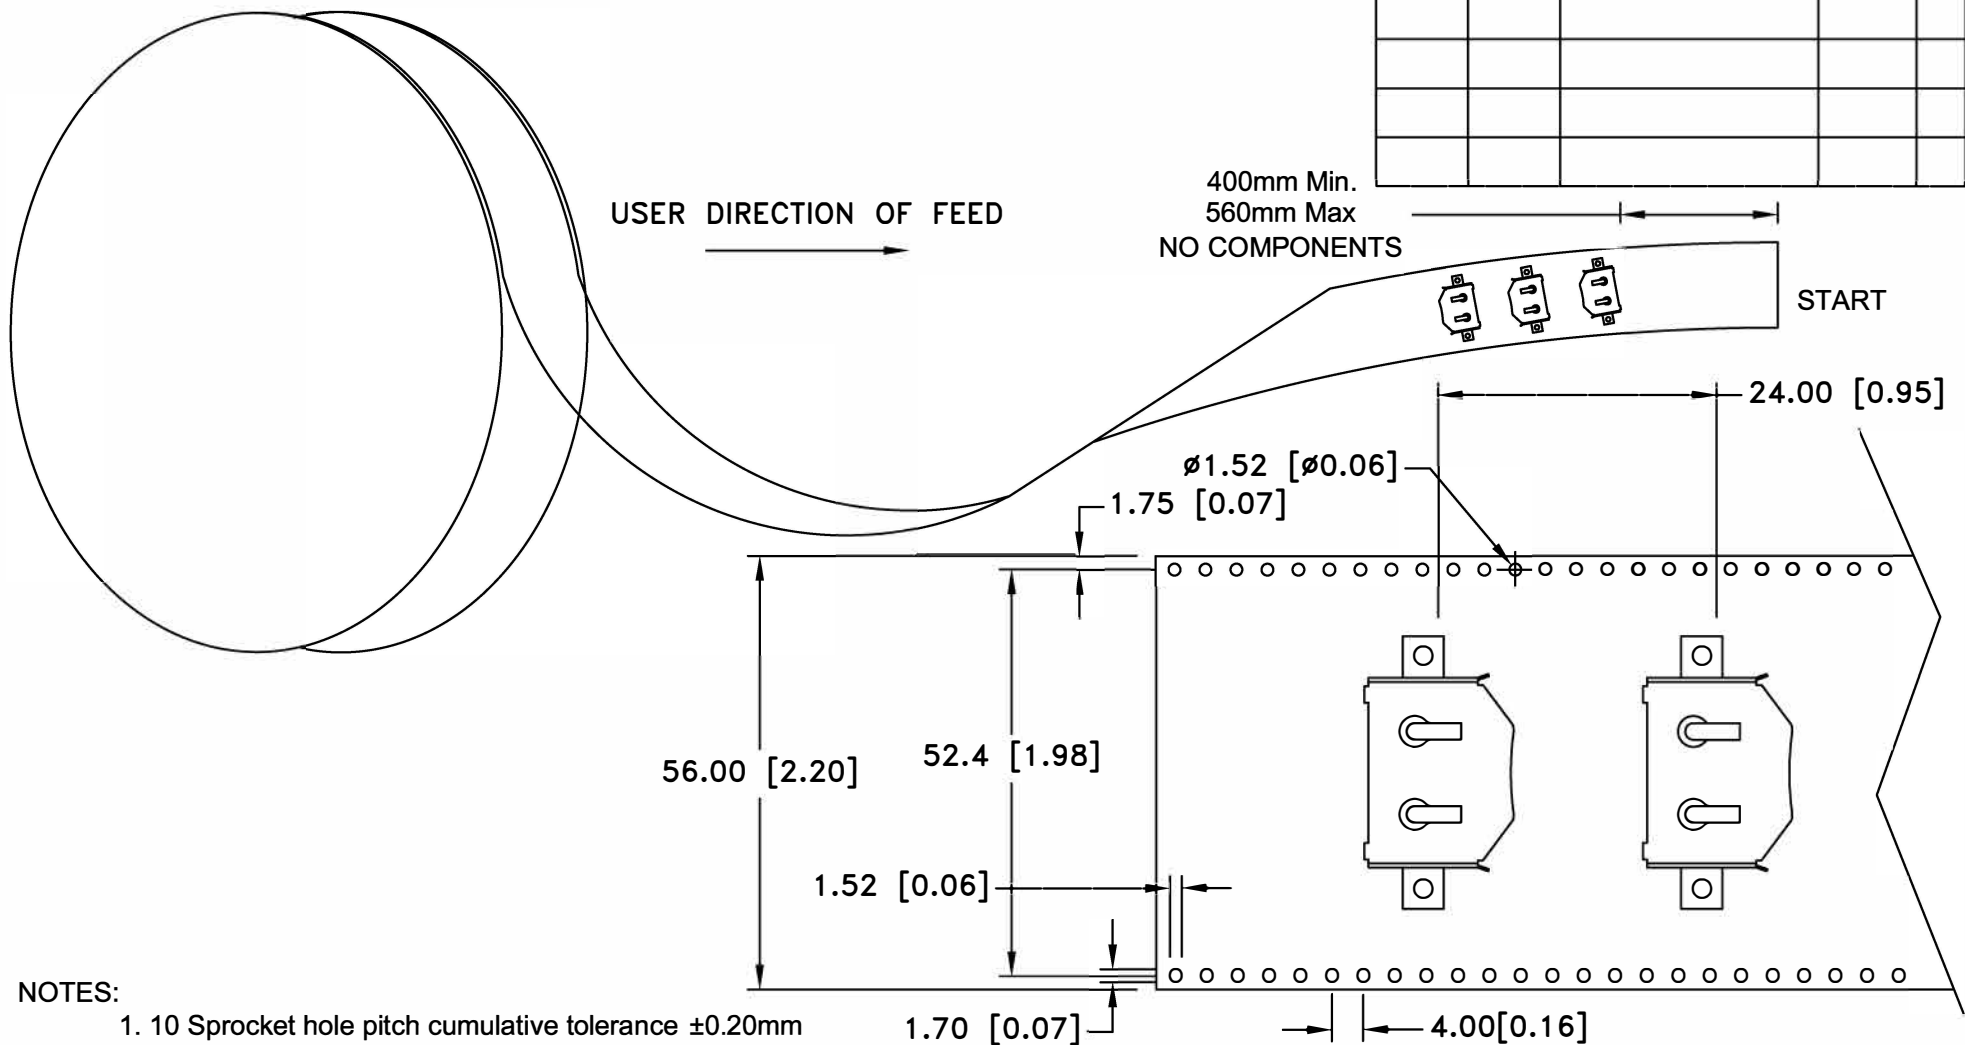

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
  2. Carrier camber not to exceed 1mm in 250mm
  3. Material: Transparent Anti-static Polystyrene
  4. Thickness:  $0.35 \pm 0.05\text{mm}$
  5. Component loader per 13" reel: 500 Pcs.
  6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	MPD MEMORY PROTECTION DEVICES Certified ISO9001:2015	MEMORY PROTECTION DEVICES, INC. Certified ISO9001:2015	Visit our Website for a complete list of our products. www.batteryholders.com www.memoryprotectiondevices.com We specialize in custom parts! sales@memoryprotectiondevices.com	
			decimal $\pm .5$ (.020)	Scale Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BRX1-2032			
Angular $\pm 3^\circ$	Date 04/03/15	Drawing Number BRX1-2032-SM-TR		