
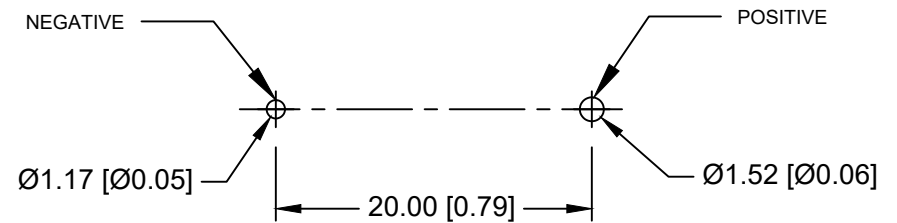


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/08/20	K	REDRAWN IN AUTOCAD DIM. 27.0 WAS 26.92 DIM. 9.10 WAS 9.14 DIM. 29.63 WAS 29.46	T.B.	B.S.	

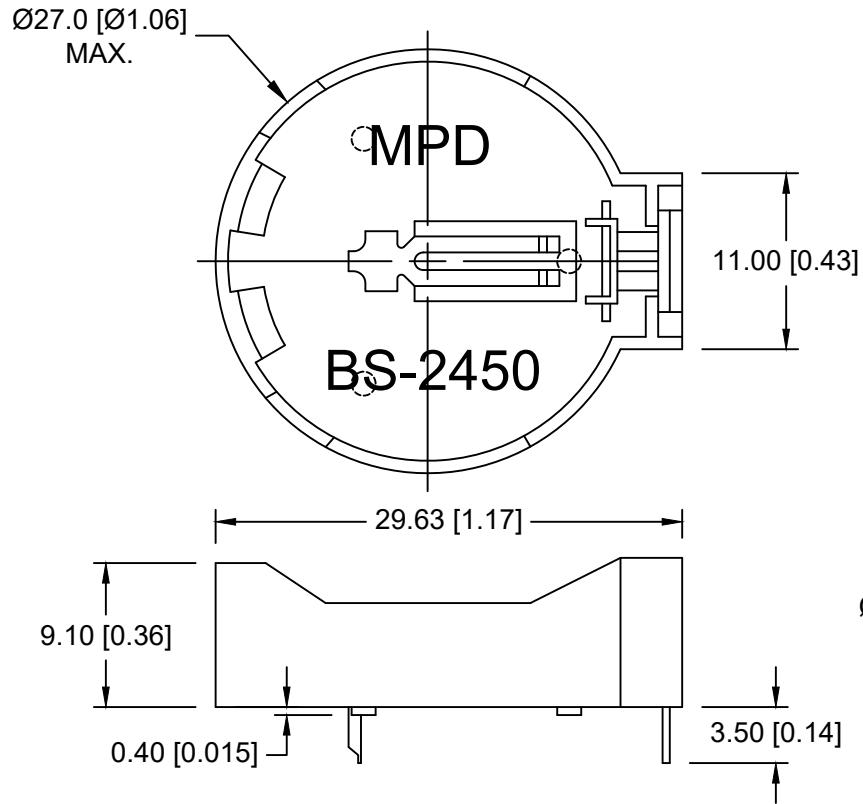

PCB LAYOUT

NOTES:

Material:

Housing: PA66 FR-Nylon with 15% glass filled, UL94v-0, UL file No. E171666

Contact: Phosphor Bronze, Nickel plated overall

Application for 3V Lithium Battery:

Insulator Resistance: 5000mΩ Max.


Operating Temperature: -55°C to +105°C

Durability: 50 Cycles Min.

Contact Resistance: 30mΩ Max.

Approximate weight: 2.12g

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title BATTERY HOLDER FOR CR2450		
Fractional ± .8 (.030)	Date 05/08/20	Drawing Number BS-2450	
Angular ± 3°			