


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/15/03	A	TIN PLATED WAS NICKEL PLATED	T.B.	B.S.	
2/25/06	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
11/21/14	C	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
03/24/17	D	UPDATED NOTE	T.B.	B.S.	
09/30/26	E	UPDATED NOTE	DL	MM	

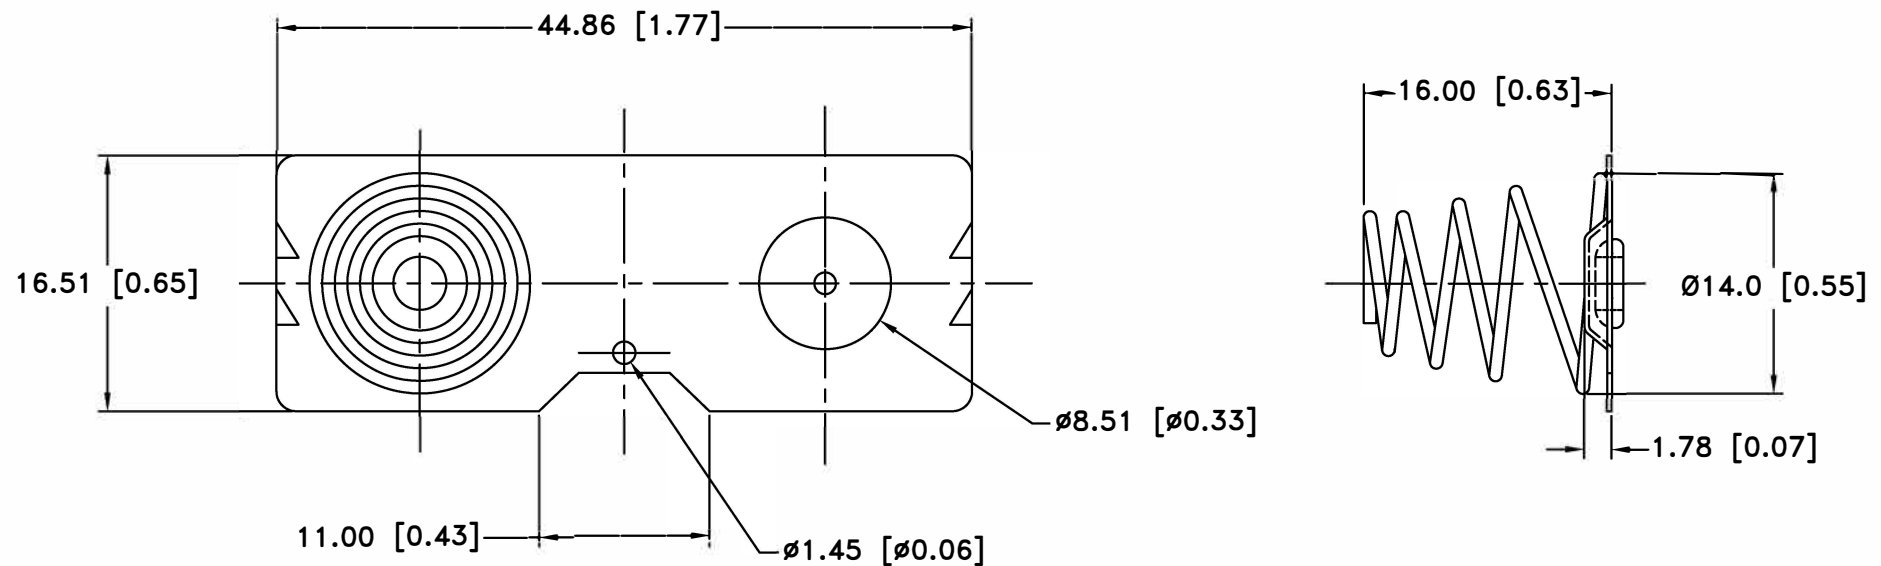

NOTES:

1. BASE: STEEL, 0.3mm (0.012") THICK. BRIGHT TIN PLATED.
2. SPRING: STEEL, 0.8mm (0.032") THICK. NICKEL PLATED.
3. ROHS 2 COMPLIANT

The minimum compressed height (approx 1lb of force) will be 0.45" from the front face of the part.

The maximum compressed height (approx 3lb of force) will be 0.10" from the front face of the part.

The spring height from the front face with no load should be approximately 0.65".

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)			Scale Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title SNT8 "C" CELL BATTERY CONTACT		
Angular $\pm 3^\circ$	Date 03/24/17	Drawing Number SN-T8-3	